

PART NUMBER

KAT177502

REV.

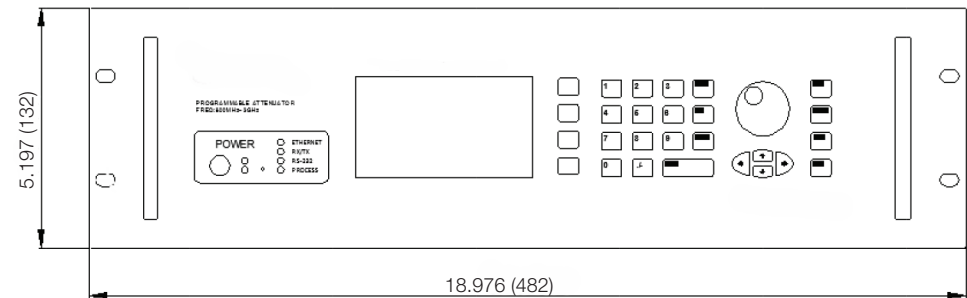
DATE

COMMENTS

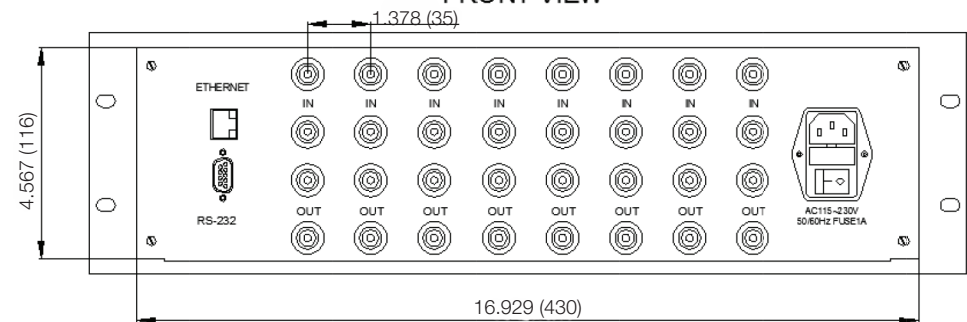
INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	0.6 GHz - 6 GHz.
Attenuation Range	0-110 dB 1 dB per Step
Attenuation Accuracy	0-31 \leq \pm 0.5 dB; 32-93 \leq \pm 1 dB; 94-110 \leq \pm 2%
Insertion Loss	\leq 0.6G \leq 6.9 dB, 3G \leq 9.7 dB, 6G \leq 15.5 dB
Input Power (Avg)	+33 dBm
Power Supply	100-240 VAC 50-60 Hz
VSWR	\leq 1.4

Mechanical DataTemperature Range: -10 $^{\circ}$ C - 50 $^{\circ}$ C

FRONT VIEW

REAR VIEW
CHASSIS DEPTH = 18.110 (460)

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RFWWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KAT177502

DESCRIPTION

16 Port Programmable Attenuator, N Female Jack

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.