

PART NUMBER

KAT177638

REV.

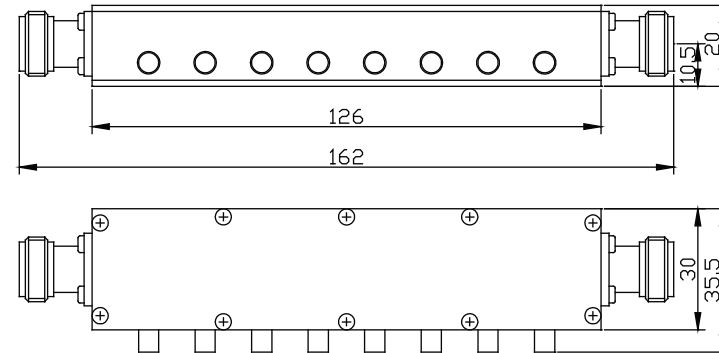
DATE

COMMENTS

INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	DC - 3 GHz.
Attenuation	0-60 dB in 1 dB Steps
Attenuation Step (dB)	1,2,4,8,10,10,10,16
Attenuation Accuracy	+/- 0.8 dB, 0-10 dB +/- 2 dB, 10-50 dB +/- 4% dB \geq 50 dB
Insertion Loss	\leq 3.5 dB
Peak Power	100W (5 μ s pulse width with 2% duty cycle)
Average Power	10W
VSWR	1.5 Max

Mechanical DataTemperature Range: -20 $^{\circ}$ C - 85 $^{\circ}$ C**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RFWWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KAT177638

DESCRIPTION

Pushbutton Step Attenuator, N Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.**Component**Connectors
Center Contact**Material**Brass
BeCu**Plating**Nickel
Gold