

PART NUMBER

KAT177688

REV.

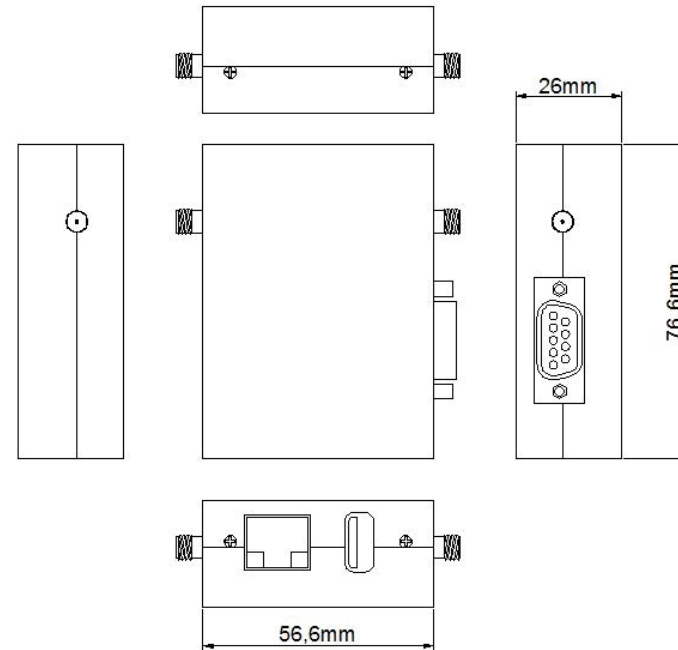
DATE

COMMENTS

INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	700 MHz - 8 GHz.
Attenuation	0-30 dB (available 0-60 dB, 0-90 dB, 0-127 dB)
Attenuation Step	1 dB per Step (available 0.25 dB per step)
Attenuation Accuracy	0-31 \leq +/- 0.3 dB; 32-95 \leq +/- 1.5%; 96-127 \leq +/- 3%
Input Power	33 dB
Insertion Loss	1 Mhz \leq 5.3 dB, 3 GHz \leq 6.8 dB, 6 GHz \leq 9.8 dB
Power Supply	100-240 Vac 50-60 Hz
Control Interface	RS-232 and Ethernet
VSWR	1.35

Mechanical DataTemperature Range: -10 $^{\circ}$ C - 50 $^{\circ}$ C**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: (mm)

Konnect RFWWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KAT177688

DESCRIPTION

Digital Step Attenuator, 1 Channel, SMA Female Connectors

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.