

PART NUMBER

**KAT177731**

REV.

DATE

COMMENTS

INITIAL


RoHS Compliant

**Electrical Data**



Impedance	50 $\Omega$
Frequency Range	DC - 8 GHz
Insertion Loss	$\leq$ 8 dB
VSWR	$\leq$ 1.80
Attenuation Range	0 - 95 dB
Attenuation Steps	0.25, 0.5, 1, 2, 4, 8, 16, 32, 32 dB
Attenuation Accuracy	$\pm$ 0.75 dB (0.25, 0.5, 1, 2, 4 dB Steps ) $\pm$ 1.5 dB (8, 16, 32 dB Steps)
RF Input Power	50W

**Mechanical Data**


Switching Life	> 1 Million Times
AC Supply	100 - 240 VAC
Controlling Interface	LAN

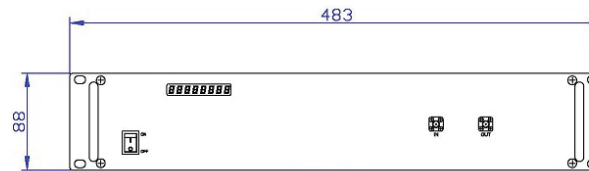

Front View

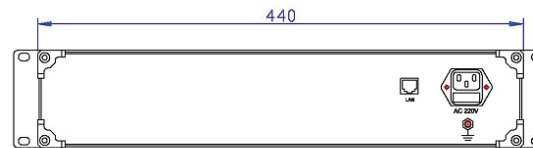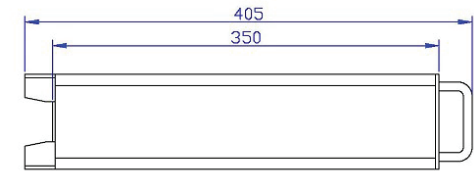

Back View

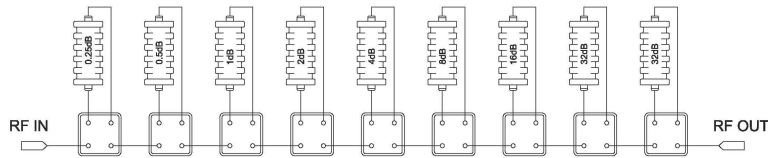

Drawing not to scale. Dimensions for reference only

Units: mm

**Konnect RF**

**WWW.KONNECTRF.COM**  
**1-800-790-5887**

PART NUMBER

**KAT177731**

DESCRIPTION

**Programmable Attenuator, High Power  
SMA Female Jack**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.