PART NUMBER

KAD179910

REV.	DATE	COMMENTS	INITIAL

RoHS Compliant

Electrical Data

Impedance	50 Ω
Frequency Range	DC - 50 GHz.
Insertion Loss	0.40 dB Max
VSWR	1.25

Mechanical Data

Durability	2,000 Cycles Min.
Storage Temperature:	-55 °C - 125 °C
Operating Temperature	0 °C - 85 °C
Recommended Torque	
NMD 2.4mm Female	1.35-2 NM
2.4mm Female	0.9 NM

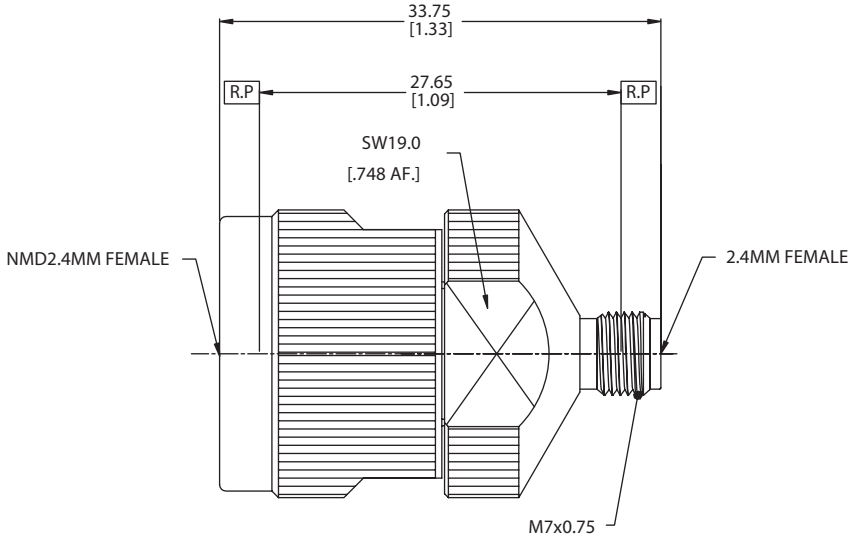

Drawing not to scale. Dimensions for reference only **Units: mm (inches)**

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER **KAD179910**

CAGE CODE **664U0**

SIGNATURE X

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.

DESCRIPTION **Adapter, Between Series, NMD2.4mm Female Jack to 2.4mm Female Jack**

Component	Material	Plating/Finish
Body	Stainless Steel	Passivated
Center Contact	BeCu	Gold
Insulator	PEI	