

PART NUMBER

KAD187034

REV.

DATE

COMMENTS

INITIAL


RoHS Compliant

Electrical Data

Impedance	50 Ω
Frequency Range	DC - 67 GHz.
Insertion Loss	0.1 XSWRT[F(GHz)] dB max
Voltage Rating	500 VRMS
Insulation Resistance	5000 M Ω min
Dielectric Withstanding Voltage	2000 VRMS min
VSWR	1.25 max
Intermodulation 3rd Order	N/A

Mechanical Data

Durability	500 Cycles Min.
Temperature Range:	-40 °C - 125 °C

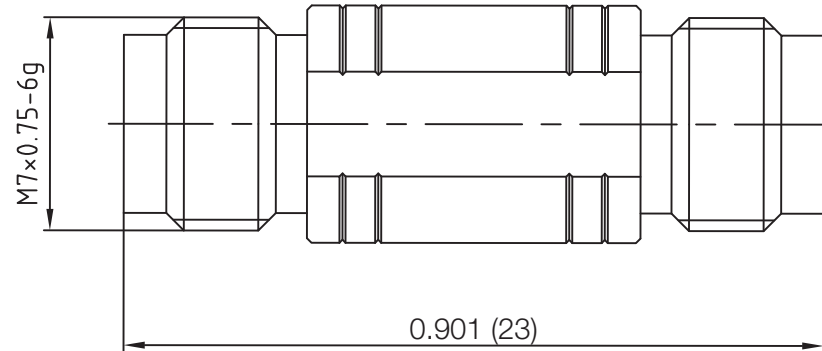

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KAD187034

DESCRIPTION

**Adapter, 1.85mm female to 1.85mm female,
Passivated Stainless Steel**

CAGE CODE

664U0

SIGNATURE

X

Component

Body
Inner Contact
Outer Contact
Insulator

Material

Stainless Steel
Stainless Steel
BeCu
PEI

Plating

Passivated
Passivated
Gold

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.