

PART NUMBER

KAD187510

REV.

DATE

COMMENTS

INITIAL


Electrical Data

Impedance	50 Ω
Frequency Range	DC - 65 GHz.
Insertion Loss	0.05 x SQRT [F(GHz)] dB MAX
Voltage Rating	335 VRMS
Insulation Resistance	5000 M Ω MIN
Dielectric Withstanding Voltage	750 VRMS MIN
VSWR	1.35 @ 35GHz

RoHS Compliant

Mechanical Data

Durability	500 Cycles Min.
Temperature Range:	-55 °C - 155 °C

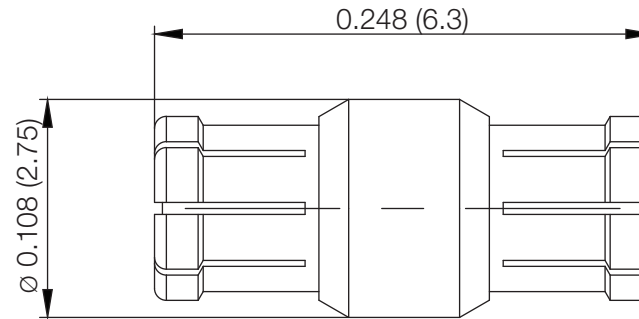

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KAD187510

DESCRIPTION

Adapter, In-Series, SMPM Female Jack to Female Jack

CAGE CODE

664U0

SIGNATURE

X

ComponentOuter/Inner Contact
Insulator**Material**BeCu
PEI**Plating**

Gold

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.