

PART NUMBER

KAT177008-XX

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance 50Ω
 Frequency Range DC - 18GHz.
 Dielectric Withstanding Voltage 1,000V Max At Sea Level
 VSWR ≤ 1.35
 Power 2W

RoHS Compliant**Mechanical Data**

Durability 500 Cycles Min.
 Temperature Range: -50 °C - 125 °C
 Center Contact Capturing Mechanical Captured

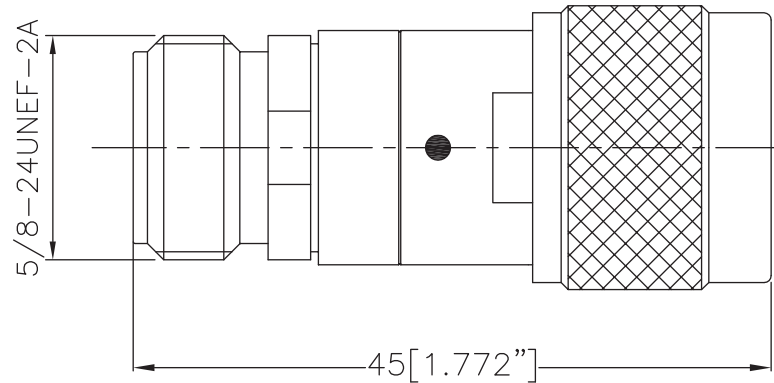

Attenuation	Tolerance
2dB	±0.5dB
3dB	±0.5dB
4dB	±0.6dB
6dB	±0.6dB
8dB	±0.7dB
10dB	±0.7dB

Drawing not to scale. Dimensions for reference only

Units: mm (Inches)

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KAT177008-XX

DESCRIPTION

Fixed Attenuator, N Male/Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component
 Body & Nut
 Center Contact
 Insulator

Material
 Brass
 BeCu
 PTFE

Plating
 White Bronze
 Gold