

PART NUMBER

KAT177009

REV.

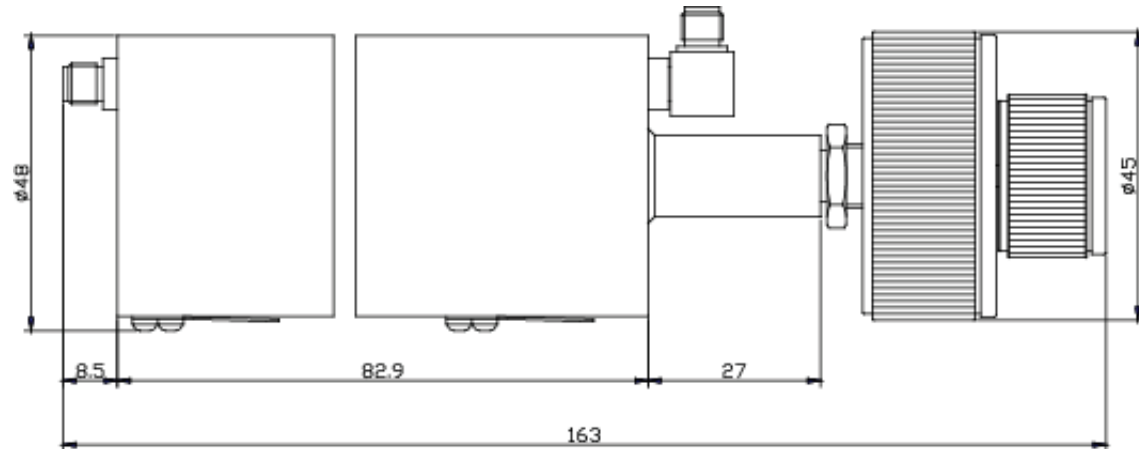
DATE

COMMENTS

INITIAL

Electrical Data

Impedance	50 Ω
Average Power	2W
Peak Power	200W (5 μ s pulse width with 1% duty Cycle)
Frequency Range	DC - 8 GHz
Attenuation Step Size	0-69dB in 1 dB steps
Insertion Loss	\leq 1.0 dB
VSWR	1.50 Max
Attenuation Accuracy	\pm 0.5db @ 0-9 dB \pm 1.0dB @ 10-19dB \pm 1.5dB @ 20-49 dB \pm 2.0Db @ 50-70 dB

RoHS Compliant**Mechanical Data**Temperature Range: -0 $^{\circ}$ C - 54 $^{\circ}$ C

Drawing not to scale. Dimensions for reference only

Units: mm \pm 5%**Konnect RF**WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KAT177009

DESCRIPTION

Rotary Attenuator, SMA Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.