

PART NUMBER

KAT177268

REV.

INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	DC - 1 GHz.
Insertion Loss	≤ 1.5 dB
Attenuation Range	0-60dB in 1 dB Steps
Attenuation Accuracy	± 0.5 dB 0-10dB ± 0.8 dB 10-50dB
VSWR	$\pm 3\%$ dB ≥ 50 dB ≤ 1.40

Mechanical Data

Weight	170g
Temperature Range:	-20 °C - 85 °C

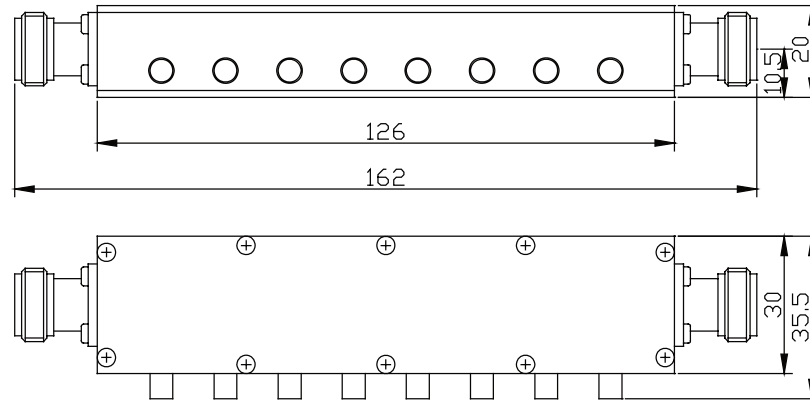
RoHS Compliant

Illustration shown with N Connectors, KAT177268 supplied with BNC Connectors

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KAT177268

DESCRIPTION

Bench Top Push Button Attenuator, BNC Female Jack

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.

Component

BNC Connectors
Center Contact
Housing

Material

Brass
BeCu
Aluminum

Plating

Nickel
Gold
Blue Spray Painting