

PART NUMBER

KAT177307-XX

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range DC - 4 GHz.
 Power Rating 50 Watts Average
 Attenuation Range & Accuracy 1-10 +/- 0.5 dB
 15-30 +/- 1 dB
 40 +/- 1.5 dB
 50 +/- 2 dB
 VSWR 1.30

RoHS Compliant**Mechanical Data**

Temperature Range: -55 $^{\circ}\text{C}$ - 125 $^{\circ}\text{C}$

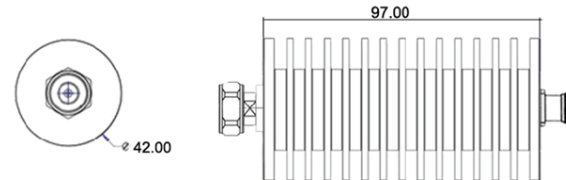

Drawing not to scale. Dimensions for reference only

Units: mm

**Substitute Attenuation Value for XX

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KAT177307-XX

DESCRIPTION

Fixed Attenuator, 4.3/10 Din Male to N Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.