

PART NUMBER

KAT177329

REV.

DATE

COMMENTS



INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	DC - 4 GHz.
Attenuation Range	90 dB
Residual Insertion Loss	5 dB nominal
VSWR	1.50:1 @ 1 GHz 1.60:1 @ 2 GHz 1.70:1 @ 3 GHz 1.80:1 @ 4 GHz

RoHS Compliant**Mechanical Data**

Average Power	@25 C : 5 W
Power Derating	(-20 °C - 85 °C): 5 W to 0 W
Peak Power	(0.5 kW)

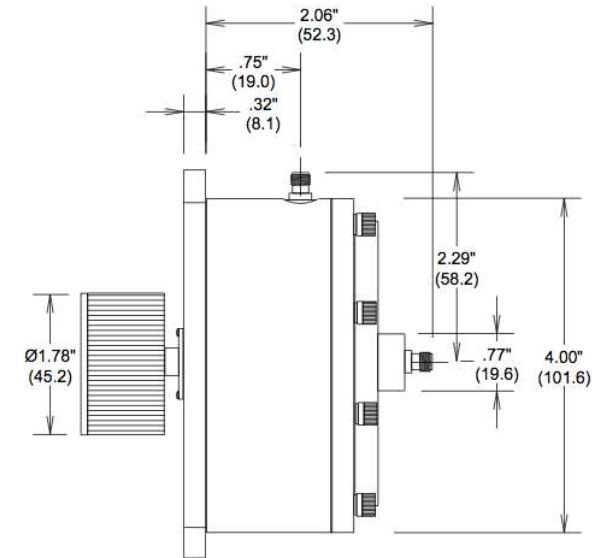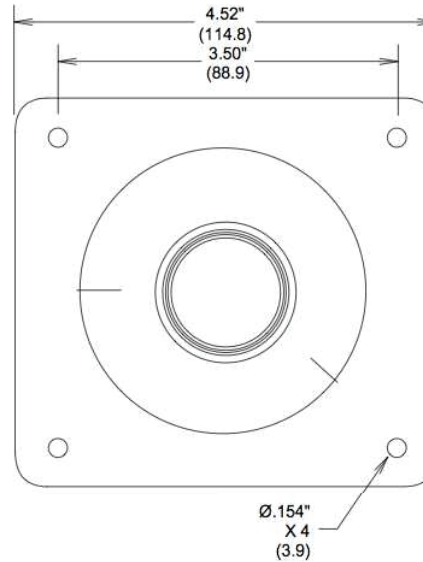

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RFWWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KAT177329

DESCRIPTION

Continuously Variable Rotary Attenuator, N Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.

Component

Body
Center Contact
FacePlate
Housing

Material

Stainless Steel
BeCu
Aluminum Alloy
Alluminum Alloy

Plating/Finish

Passivated
Gold
Black Paint
Gray Paint