

PART NUMBER

KAT177385-XX

REV.

DATE

COMMENTS

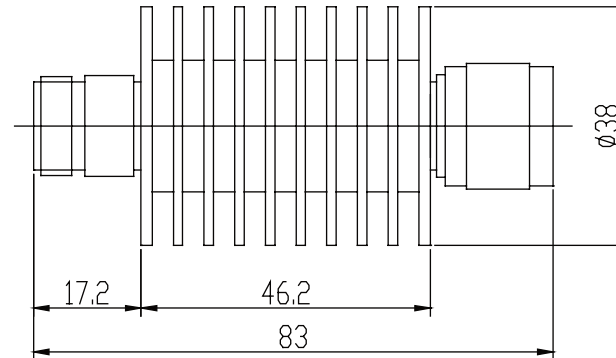
INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	DC - 3 GHz
Average Power	10W average to 25°C ambient temperature derated linearly to 1W @ 125°C
Peak Power	1KW (5 μ pulse width with 1% duty cycle)
Attenuation Value & Accuracy	1-9 dB \pm 0.4 10 dB \pm 0.5 20 dB \pm 0.6 30 dB \pm 0.6 40 dB \pm 0.8
VSWR	1.20 max

Mechanical Data

Temperature Range: -55 °C - 125 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: mm

* Drawing shows N Male to N Female. KAT177385-XX is TNC Male to TNC Female

Konnect RFWWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KAT177385-XX

DESCRIPTION

Fixed Attenuator, TNC Male/Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.**Component**Body
Male Contact
Female Contact
Insulator**Material**Brass
Brass
BeCu
PTFE**Plating**Nickel
Gold
Gold