## KAT177425-03

REV.		INITIAL

**RoHS Compliant** 

## **Electrical Data**


Frequency Range Attenuation (Loss) Accuracy DC - 3GHz 3 dB ±0.3 dB

1.2:1 @ 2GHz 1.3:1 @ 3GHz

**Input Power** 

**VSWR** 

2 Watt average

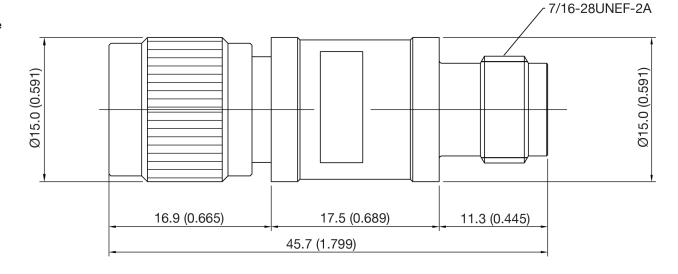

VSWR and Frequency Range Specifications are for reference and are dependent on cable type and other application specific conditions

## **H** Konnect RF

540 NW University Blvd. Ste. 109 Port Saint Lucie, Florida, 34986 1-800-790-5887

KAT177425-03		DESCRIPTION Fixed Attenuator - TNC Male/Female - 50 Ohm DC-3 GHz - 2 Watts - 3 dB		
DESIGNS IS TI KONNECT RF	SIGNATURE X  G INCLUDING THE HE PROPERTY OF AND IS NOT TO ANY PURPOSE R APPROVAL.	Materials  Body / Cap Center Contact Center Contact Insulator	Brass Brass Be-Cu PTFE	Nickel Plated Gold Plated Gold Plated