

PART NUMBER

**KAT177435-XX**

REV.


INITIAL

**Electrical Data**

Impedance 50 Ω  
 Frequency Range DC - 3 GHz  
 Attenuation Values 1-10, 12, 15 & 20 dB  
 Attenuation Accuracy ±0.3 dB  
 VSWR 1.20:1 Max.  
 Power Rating 2.0 Watts  
 Operating Temperature Range -40°C ~ + 85°C

**RoHS Compliant**

Mark-Attenuation Value

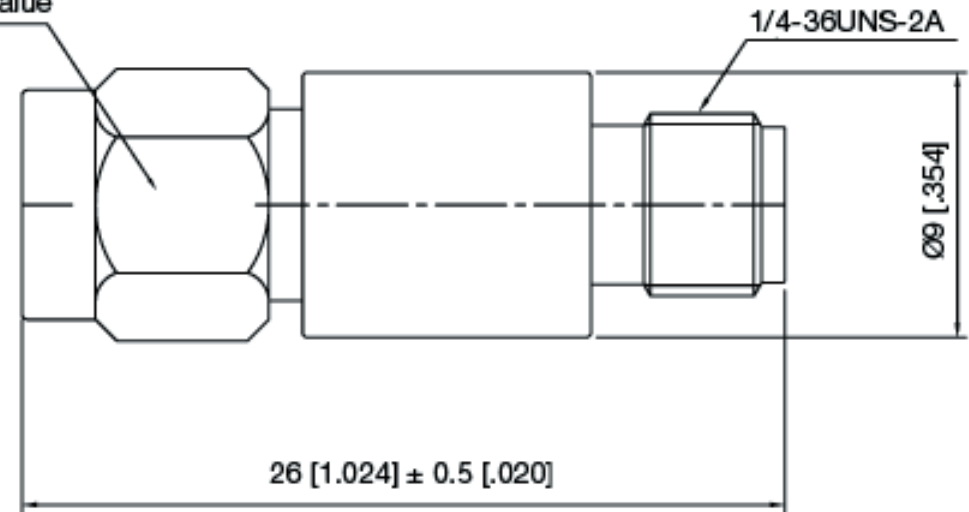

VSWR and Frequency Range Specifications  
 are for reference and are dependant on cable  
 type and other application specific conditions

Drawing not to scale. Dimensions for reference only

WWW.KONNECTRF.COM  
 540 NW University Blvd. Ste. 109  
 Port Saint Lucie, Florida, 34986  
 1-800-790-5887

PART NUMBER

**KAT177435-XX**

DESCRIPTION

**Fixed Attenuator  
SMA Male/Female**

CAGE CODE

**664U0**

SIGNATURE

X

Substitute Attenuation Value for XX

Materials

Connector  
ConductorsBrass  
Be.CuGold Plated  
Gold Plated

THIS DRAWING INCLUDING THE  
 DESIGNS IS THE PROPERTY OF  
 KONNECT RF AND IS NOT TO  
 BE USED FOR ANY PURPOSE  
 WITHOUT OUR APPROVAL.