

PART NUMBER

**KAT177483-XX**

REV.

DATE

COMMENTS

INITIAL


**Electrical Data**

Impedance 50  $\Omega$   
 Frequency Range DC - 40 GHz.  
 Average Power 2 Watts  
 VSWR  $\leq 1.40$

**RoHS Compliant****Mechanical Data**

Temperature Range: -55 °C - 125 °C

Frequency Range	GHz	DC-40									
Variants		1dB	2dB	3dB	4dB	5dB	10dB	20dB	30dB	50dB	60dB
Accuracy	dB	$\pm 1$			$\pm 1.5$			$\pm 2$			

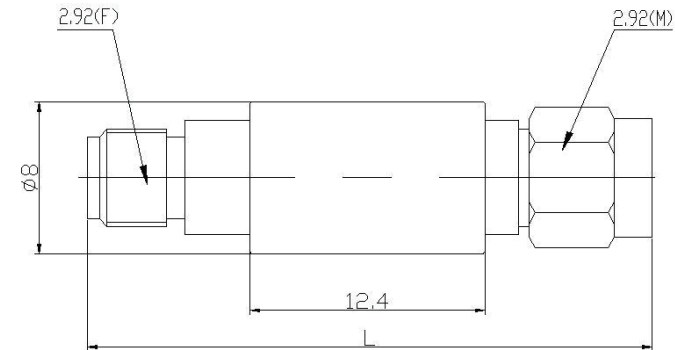

Length = 31.4mm

Drawing not to scale. Dimensions for reference only

Units: mm

**Konnect RF**

WWW.KONNECTRF.COM  
 1-800-790-5887

PART NUMBER

**KAT177483-XX**

DESCRIPTION

**Fixed Attenuator, 2.92mm Male/Female**

CAGE CODE

**664U0**

SIGNATURE

X

**Component**  
Body

**Material**  
Aluminum

**Plating/Finish**  
Passivated

THIS DRAWING INCLUDING THE  
 DESIGNS IS THE PROPERTY OF  
 KONNECT RF AND IS NOT TO  
 BE USED FOR ANY PURPOSE  
 WITHOUT OUR APPROVAL.