

PART NUMBER

KAT177521-XX

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	DC - 18 GHz.
Power Rating	2W
Peak Power	250W Max
Input Power	2W
Attenuation Accuracy	± 0.65 dB over DC-18 GHz
Attenuation Range	1-30 dB
VSWR	1.2 @ DC-4 GHz
	1.25 @ 4-8 GHz
	1.26 @ 8-12.4 GHz
	1.3 @ 12.4-18 GHz

RoHS Compliant**Mechanical Data**

Temperature Range: -65 °C - 125 °C

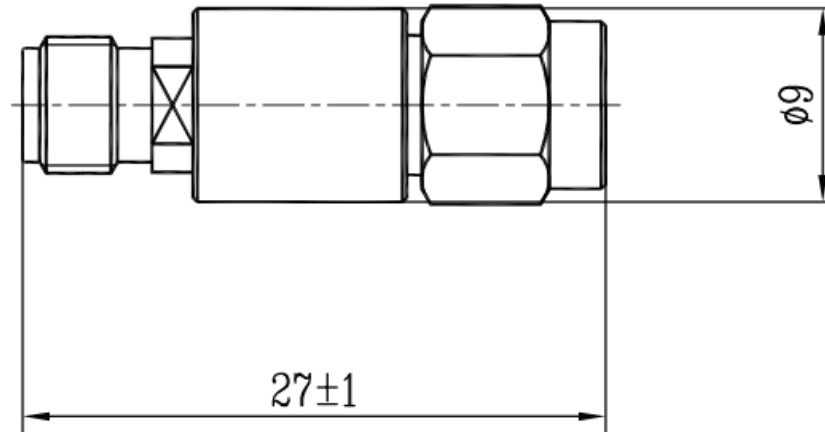

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KAT177521-XX

DESCRIPTION

Fixed Attenuator, SMA Male/Female

CAGE CODE

664U0

SIGNATURE

X

Substitute Attenuation Value for XX

ComponentBody
Center Contact**Material**Stainless Steel
BeCu**Plating/Finish**Passivated
Gold

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.