

PART NUMBER

**KAT177532**

REV.

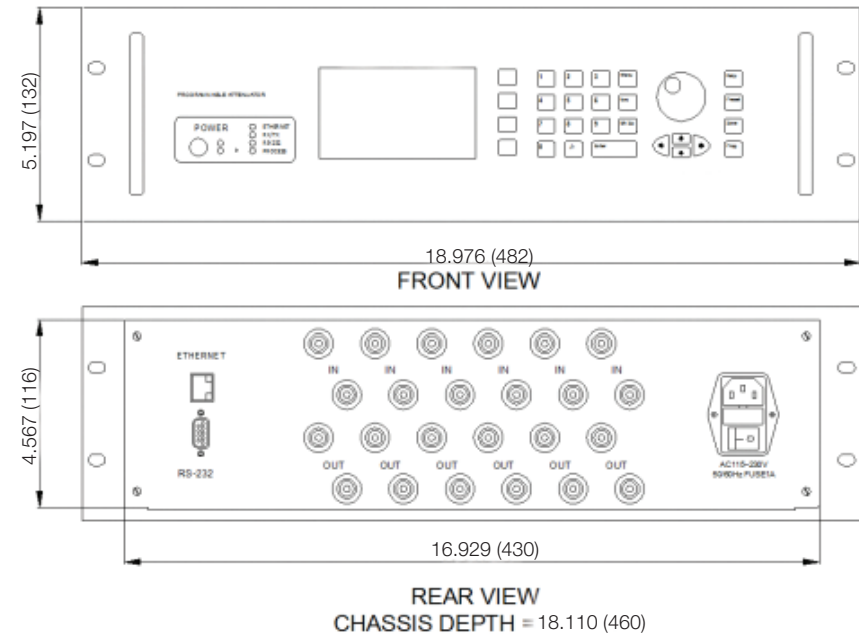
DATE

COMMENTS

INITIAL

**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	0.7 GHz - 4 GHz.
Attenuation Range	0-110 dB/127 dB
Attenuation Step	1 dB/0.5/0.25 dB per Step
Attenuation Accuracy	0-31 $\leq$ $\pm$ 0.3 dB; 32-95 $\leq$ $\pm$ 1.5%; 96-127 $\leq$ $\pm$ 3%
Insertion Loss	$\leq$ 0.7GHz $\leq$ 5.3 dB, 3 GHz $\leq$ 6.8 dB, 6 GHz $\leq$ 9.8 dB
Input Power (Avg)	+33 dBm
Height	3U
Control Interface	RS-232 and Ethernet
Display	Color 4.3- inch HD Touch Display
Power Supply	100-240 VAC 50-60 Hz
VSWR	$\leq$ 1.35

**Mechanical Data**Temperature Range: -10  $^{\circ}$ C - 50  $^{\circ}$ C**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

**Konnect RF**WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KAT177532**

DESCRIPTION

**24 Port Programmable Attenuator, N Female Jack**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.