

PART NUMBER

KAT177542-XX

REV.

DATE

COMMENTS

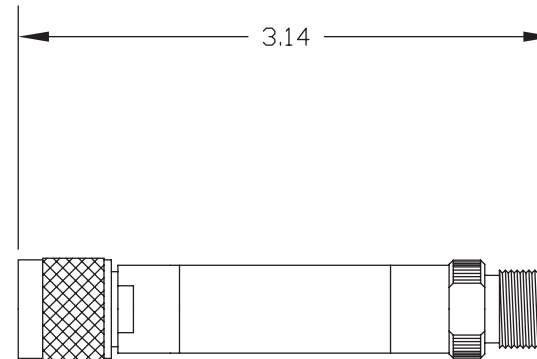
INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range DC - 2 GHz.
 Attenuation Value 1 - 40 dB Available
 Attenuation Accuracy ± 0.5 dB Max. (1-20 dB)
 ± 0.75 dB Max. (21-40 dB)
 Power Input 1 Watt Average
 VSWR 1.3 Max @ DC -1 GHz
 1.4 Max @ 1 - 2 GHz

Mechanical Data

Temperature Range: -55 $^{\circ}$ C - 100 $^{\circ}$ C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: inches

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KAT177542-XX

DESCRIPTION

Fixed Attenuator, TNC Male/Female

CAGE CODE

664U0

SIGNATURE

X

Substitute Attenuation Value in dB for XX

Component
 Body

Material
 Brass

Plating
 Nickel

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.