

PART NUMBER

KAT177557

REV.

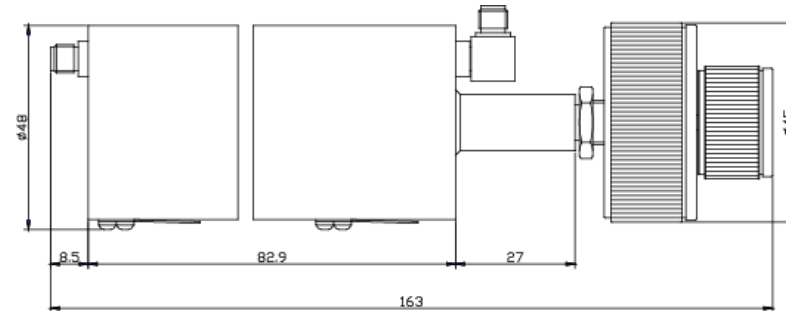
DATE

COMMENTS

INITIAL

RoHS Compliant**Electrical Data**

Impedance	50 Ω
Frequency Range	0.1-8 GHz.
Attenuation Step Size	0-99dB in 1 dB Steps
Insertion Loss	≤ 1.0 dB
Attenuation Accuracy	± 0.5 dB(0-9dB) ± 1.0 dB (10-19dB) ± 1.5 dB(20~49dB) ± 2.0 dB(50~69dB) ± 2.5 dB or 3.5%(70~99dB)
Peak Power	Average Power 2W
Max VSWR	200W (5 μ s pulse width with 0.5% duty Cycle) 1.50

**Mechanical Data**

Temperature Range: 0 °C - 54 °C

Drawing not to scale. Dimensions for reference only

Units:mm

Konnect RFWWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KAT177557

DESCRIPTION

Step Attenuator, SMA Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.**Component**Connectors
Female Pin
Housing**Material**Stainless Steel
BeCu
Aluminum**Plating**

Gold