

PART NUMBER

KAT177561-XX

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range DC - 18 GHz.
 Attenuation Accuracy - 2.0 dB/ + 2.5 dB
 Average Power 100 Watts
 Peak Power 1000 Watts
 * 5 μ s Pulse width with 15% duty cycles
 VSWR ≤ 1.40

RoHS Compliant**Mechanical Data**

Temperature Range: -55 °C - 125 °C

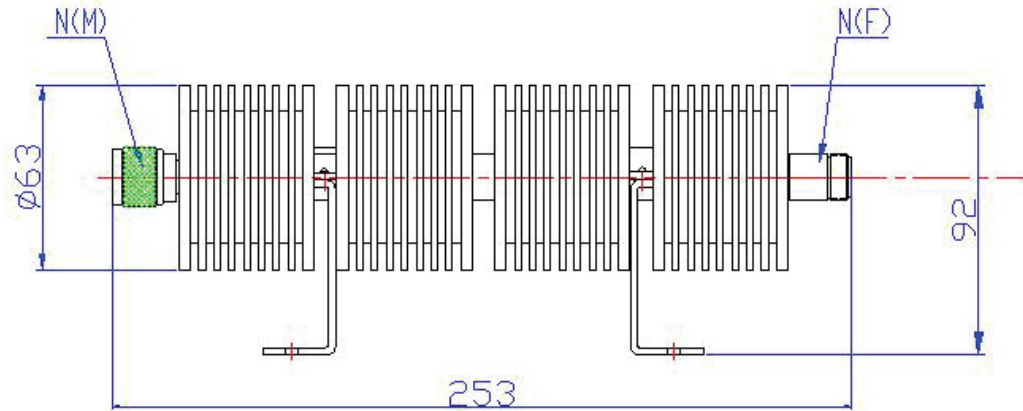

Drawing not to scale. Dimensions for reference only

Units: mm

Konnnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KAT177561-XX

DESCRIPTION

Fixed Attenuator, N Male/Female

CAGE CODE

664U0

SIGNATURE

X

Substitute Attenuation Value for XX

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component

Connectors
 Female Center Contact
 Male Center Contact
 Housing

Material

Brass
 BeCu
 Brass
 Black Anodize

Plating/Finish

Nickel
 Gold
 Gold
 Aluminum