

PART NUMBER

**KAT177623**

REV.

DATE

COMMENTS

INITIAL

A

05-17-2016

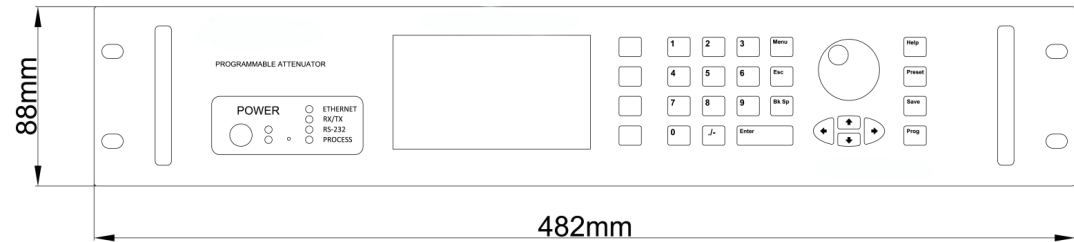
Updated Frequency Range

*MP***Electrical Data**

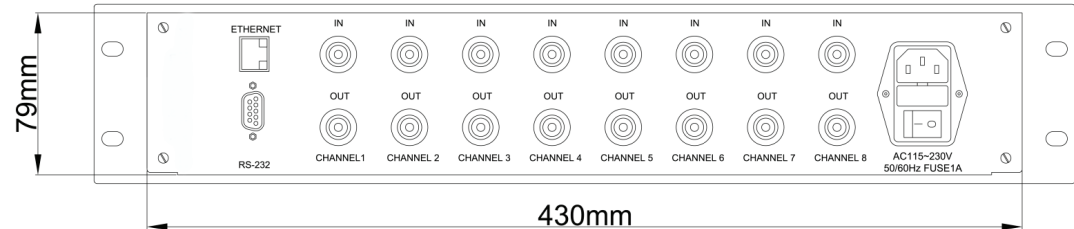
Impedance	50 $\Omega$
Frequency Range	0.03 GHz - 4 GHz.
Attenuation Range	0-127 dB
Attenuation Step	1 dB/ 0.5 dB/ 0.25 dB per step
Attenuation Accuracy	0-31 $\leq\pm 0.3$ dB; 32-127 $\leq\pm 0.5$ dB
Insertion Loss	$\leq 8$ dB
Input Power (Avg)	+33 dBm
Power Supply	100-240 VAC 50-60 Hz
Display	Color 4.3-inch HD Touch Display
VSWR	$\leq 1.35$

**Mechanical Data**

Temperature Range: -10 °C - 50 °C

**RoHS Compliant**

FRONT VIEW

REAR VIEW  
CHASSIS DEPTH = 350mm

Drawing not to scale. Dimensions for reference only

Units: mm

**Konnect RF**WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KAT177623**

DESCRIPTION

**8 Port Programmable Attenuator, N Female Jack**

CAGE CODE

**664U0**

SIGNATURE

*X*THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.