

PART NUMBER

KAT177626-XX

REV.

DATE

COMMENTS

INITIAL

Electrical Data


Impedance 50 Ω
 Frequency Range DC - 6 GHz
 Power Rating 2W @ 25°C Derated Linearly to 0 Watts @ 125°C
 Attenuation Range & Accuracy 1-10 +/- 0.5 dB
 11-20 +/- 0.6 dB
 21-30 +/- 0.8 dB

Maximum VSWR 1.25

RoHS Compliant

Mechanical Data

Temperature Range: -55 °C - 125 °C
 Temperature Coefficient <0.0004 dB/dB/°C

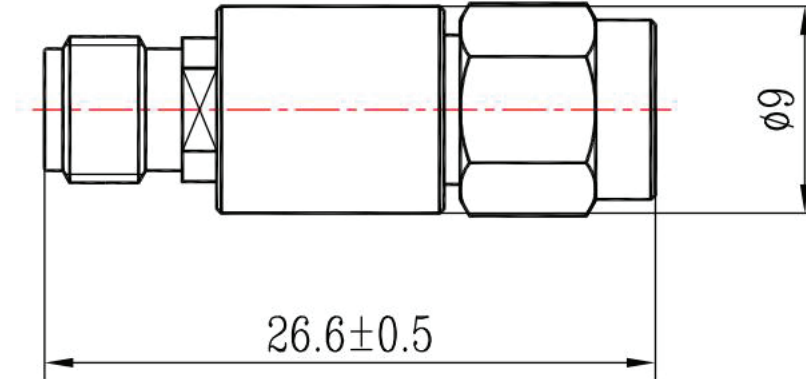

Drawing not to scale. Dimensions for reference only

Units: mm

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KAT177626-XX

DESCRIPTION

Fixed Attenuator, SMA Male/Female

CAGE CODE

664U0

SIGNATURE

X

Component
Body

Material
Stainless Steel

Plating/Finish
Passivated

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.