

PART NUMBER

KAT177693-XX

REV.

DATE

COMMENTS

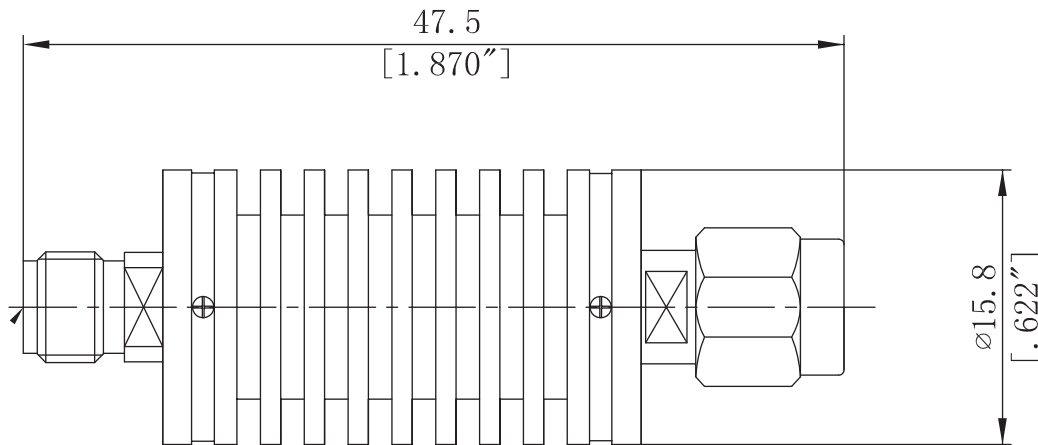
INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range DC - 18 GHz.
 Attenuation Value 10dB
 20 dB
 Input Power 10W
 Insulation Resistance 5,000 M Ω min
 Dielectric Withstanding Voltage 1,000V Max At Sea Level
 VSWR \leq 1.35 @ 18GHz

Mechanical Data

Temperature Range: -55 $^{\circ}$ C - 125 $^{\circ}$ C

RoHS Compliant

Attenuation Value= XX

Drawing not to scale. Dimensions for reference only

Units: mm (Inches)

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KAT177693-XX

DESCRIPTION

Fixed Attenuator, SMA Male/Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component
 Body & Nut
 Center Contact
 Insulator

Material
 Brass
 BeCu
 PTFE

Plating
 Gold
 Gold