

PART NUMBER

KAT177796-XX

REV.

DATE

COMMENTS

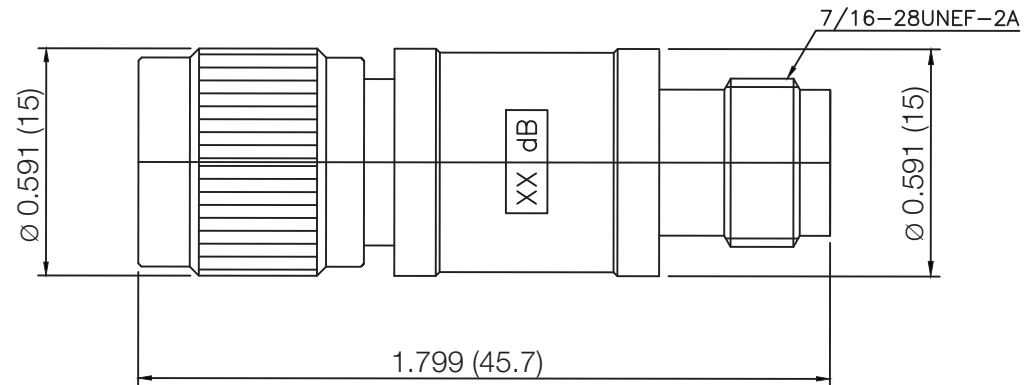
INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range DC - 3.0GHz.
 Attenuation values 1-10dB \pm 0.5dB
 12dB \pm 0.5dB
 15dB \pm 0.5dB
 20dB \pm 0.5dB
 30dB \pm 0.5dB
 VSWR 1.20Max
 Power Rating 2.0 Watts

Mechanical Data

Temperature Range: -40 $^{\circ}$ C - 85 $^{\circ}$ C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KAT177796-XX

DESCRIPTION

Fixed Attenuator, TNC Male/Female

CAGE CODE

664U0

SIGNATURE

X

Attenuation Value =XX db

Component
 Body
 Center Contact

Material
 Brass
 BeCu

Plating
 Nickel
 Gold

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.