

PART NUMBER

KAT177822-20

REV.

DATE

COMMENTS

INITIAL


Electrical Data

Impedance 50 Ω
 Frequency Range DC - 3 GHz.
 Insertion Loss 20 +/- 0.5 dB
 Insulation Resistance 5,000 M Ω Min
 Average Power 2 W
 Dielectric Withstanding Voltage 1,000V Max @ Sea Level
 VSWR \leq 1.20 @ DC-3 GHz

RoHS Compliant

Mechanical Data

Durability 500 Cycles Min.
 Temperature Range: -20 $^{\circ}$ C - 115 $^{\circ}$ C

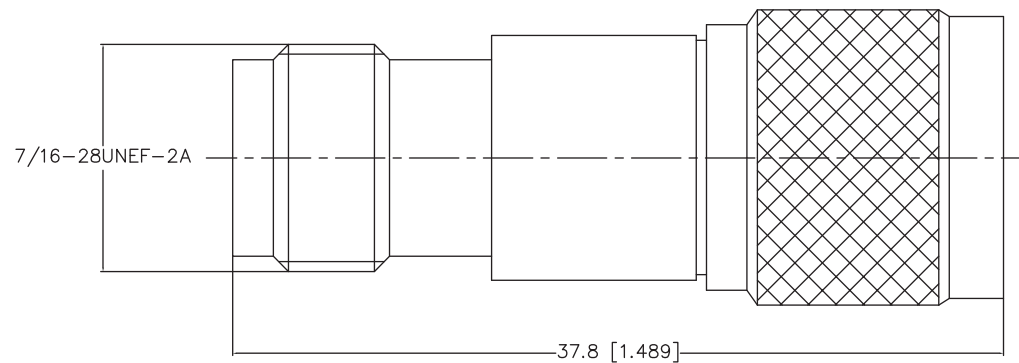

Drawing not to scale. Dimensions for reference only

Units: mm (inches)

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KAT177822-20

DESCRIPTION

Fixed Attenuator, TNC Male/Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component

Body & Coupling Nut
 Center Contact
 Insulator

Material

Brass
 Brass
 PTFE

Plating

Nickel
 Gold