

PART NUMBER

KAT177823

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range DC-8 GHz.
 Average Power 10W
 Insertion Loss ≤ 0.5 dB
 Attenuation Range ≥ 40 dB
 VSWR ≤ 1.50

RoHS Compliant**Mechanical Data**

Temperature Range: -40 $^{\circ}$ C - 65 $^{\circ}$ C

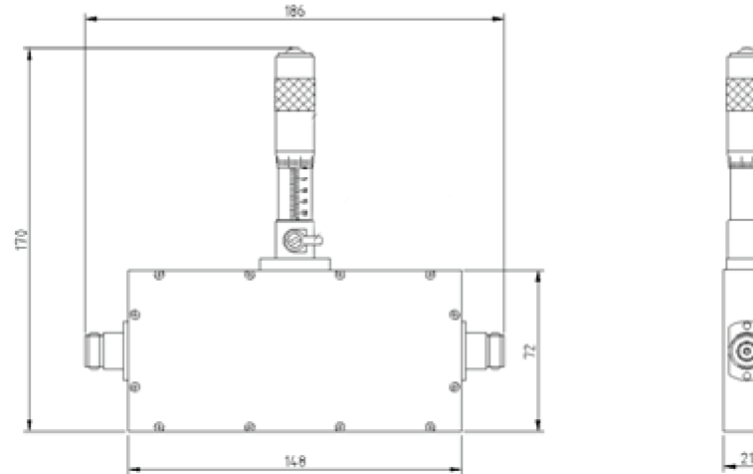

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KAT177823

DESCRIPTION

Continuous Variable Attenuator, N Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component

Body
 Center Contact

Material

Brass
 BeCu

Plating

Nickel
 Gold