

PART NUMBER

KAT177837-XX

REV.

DATE

COMMENTS

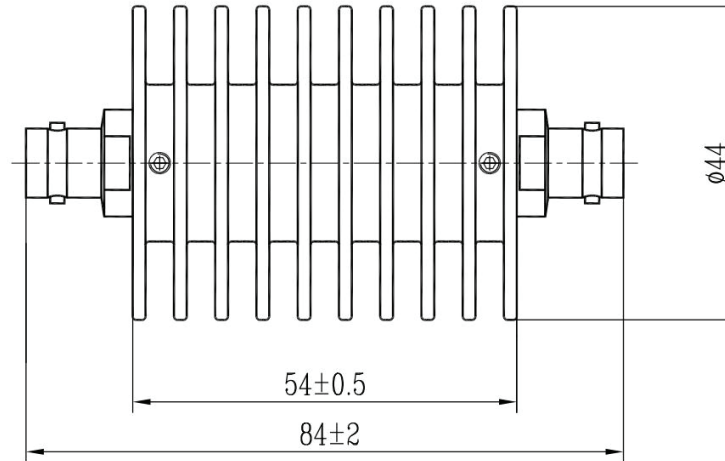
INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range DC - 4 GHz.
 Power Rating 25W @25°C derated linearly to 0 watts @ 125°C
 Attenuation Range
 1-10dB ± 0.4 dB
 11-20dB ± 0.5 dB
 21-30dB ± 0.7 dB
 40-50dB ± 0.7 dB
 VSWR 1.20 Max

Mechanical Data

Temperature Range: -55 °C - 125 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KAT177837-XX

DESCRIPTION

Fixed Attenuator, BNC Female/Female

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component

Body
 Connector

Material

Aluminum blackening
 Brass

Plating

White Bronze