

PART NUMBER

KAT177872-XX

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range DC - 3 GHz.
 Attenuation Range 50 +/- 1.0 dB
 Power Rating 100W @ 25°C
 VSWR 1.20

RoHS Compliant**Mechanical Data**

Temperature Range: -55 °C - 125 °C

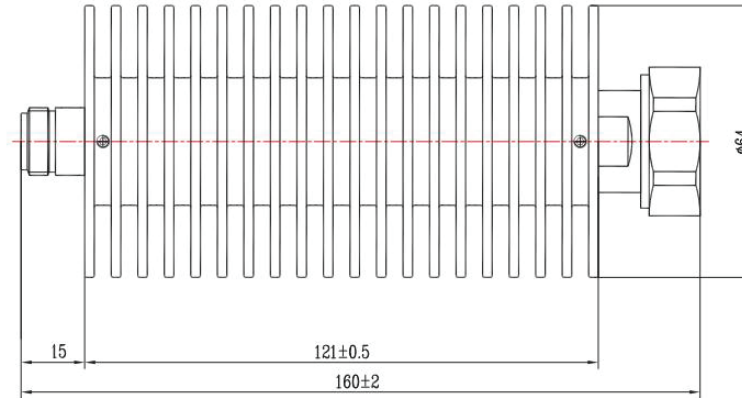

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KAT177872-XX

DESCRIPTION

Fixed Attenuator, 7/16 DIN Male Plug/ N Female Jack

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Substitute Attenuation Range for XX

Component
 Center Contact
 Heat Sink

Material
 BeCu
 Black Anodized Aluminum

Plating
 Gold