

PART NUMBER

KAT177883-XX

REV.

DATE

COMMENTS

INITIAL

Electrical Data


Impedance 50 Ω
 Power Rating 50W @25°C derated linearly to 0 watts @ 125°C
 Frequency Range DC - 18 GHz.
 Attenuation Range 1-10 dB @ ± 0.8 dB
 20 dB @ ± 0.9 dB
 30 dB @ ± 1.1 dB
 40-50 @ 1.2 dB-1.3 dB

VSWR 1.45 Max

Mechanical Data

Temperature Range: -55 °C - 125 °C
 Temperature Coefficient <0.0004 dB/dB/°C

RoHS Compliant

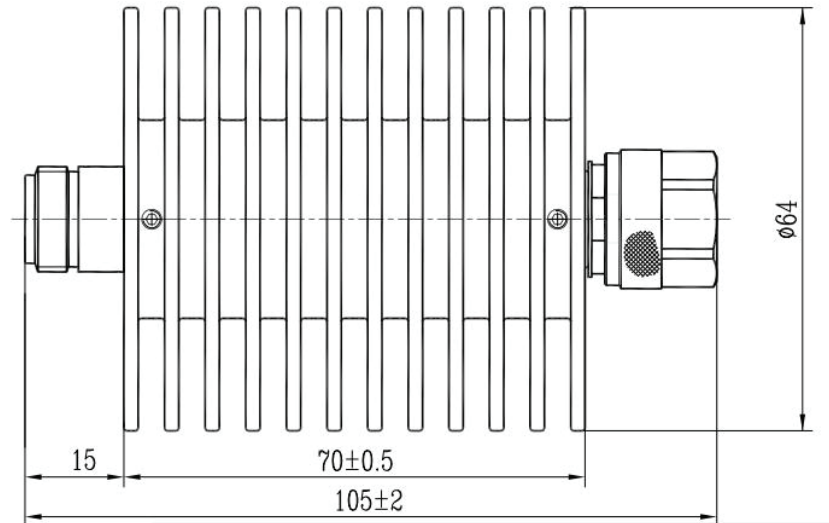

Drawing not to scale. Dimensions for reference only

Units: mm

*Drawings Show N Male/Female, Actual Part Provided w/ N Female/Female

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KAT177883-XX

DESCRIPTION

Fixed Attenuator, N Female/Female

CAGE CODE

664U0

SIGNATURE

X

Component
Body

Material
Brass

Plating
White Bronze

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.