

PART NUMBER

KAT177923-XX

REV.

DATE

COMMENTS

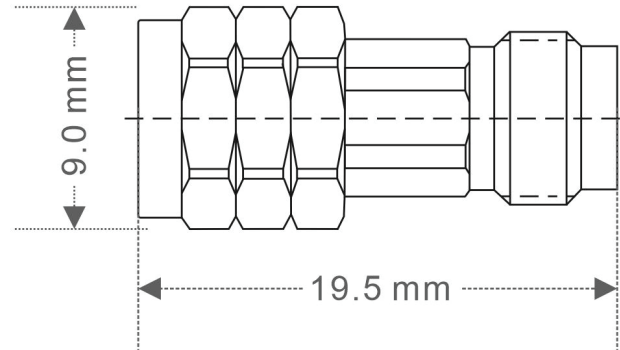
INITIAL

Electrical Data

Impedance 50 Ω
 Power Rating 2W @25 °C derated linearly to 0 watts @ 125 °C
 Frequency Range DC-67GHz
 Attenuation Range 3, 6dB @ -1.0~+1.2dB
 10dB @ -1.0~+1.2dB
 20dB @ \pm 1.2dB
 30dB @ \pm 1.5dB
 VSWR 1.35

Mechanical Data

Temperature Range: -55 °C - 125 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KAT177923-XX

DESCRIPTION

Fixed Attenuator, 1.85mm Male/Female,Bidirectional

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component

Body
 Center Contact

Material

Stainless Steel

Plating/Finish

Passivated
 Gold