

PART NUMBER

**KAT177950-XX**

REV.

DATE

COMMENTS

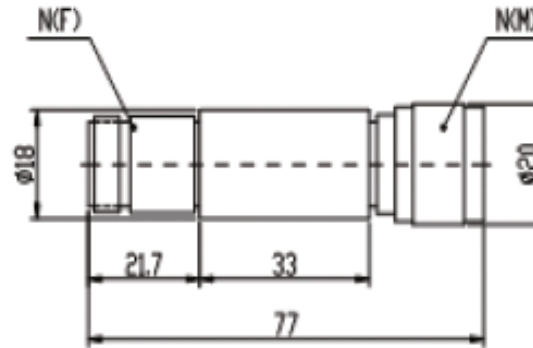
INITIAL

**Electrical Data**

Impedance 50  $\Omega$   
 Frequency Range DC - 6 GHz.  
 Attenuation 1,2,3,4,5,6,7,8,9,10  
 Attenuation Accuracy +/-0.5 dB  
 Power Rating 2 Watts Max  
 Peak Power 0.5 KW  
 VSWR 1.25

**Mechanical Data**

Temperature Range: -55 °C - 125 °C

**RoHS Compliant**

Drawing not to scale. Dimensions for reference only

Units: mm

**Konnnect RF**

WWW.KONNECTRF.COM  
 1-800-790-5887

PART NUMBER

**KAT177950-XX**

DESCRIPTION

**Fixed Attenuator, N Male/Female**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
 DESIGNS IS THE PROPERTY OF  
 KONNECT RF AND IS NOT TO  
 BE USED FOR ANY PURPOSE  
 WITHOUT OUR APPROVAL.

**Component**  
Body

**Material**  
Brass

**Plating**  
Nickel