

PART NUMBER

KAT177984-XX

REV.

DATE

COMMENTS

INITIAL

Electrical Data

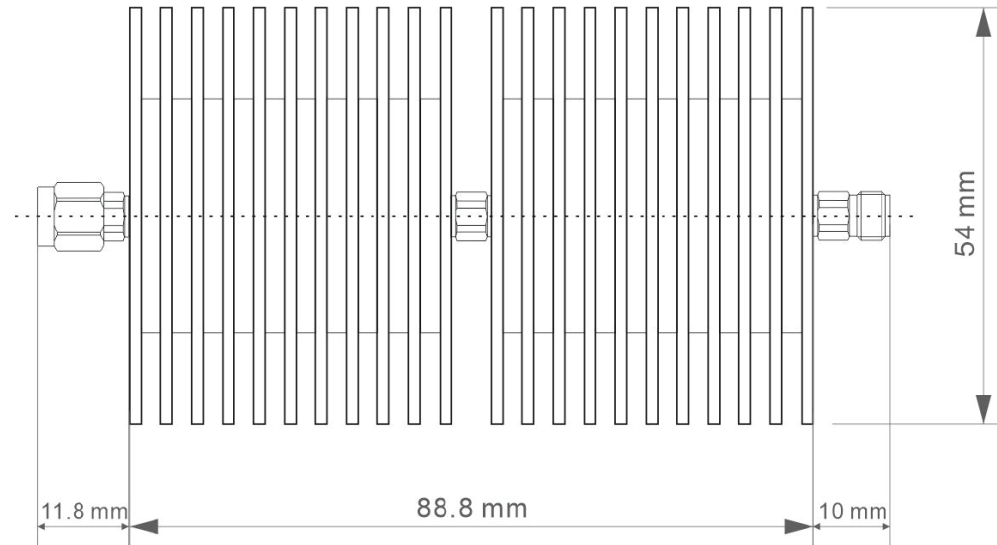
Impedance 50 Ω
 Power Rating 50 Watts @25°C derated linearly to 0 watts @ 125°C
 Peak Power 0.20kW (5 μ s pulse width, 10% duty cycle)
 Frequency Range DC-40 GHz
 Attenuation Range 10dB -3.0dB~+4.0dB
 20dB \pm 3.0dB
 30dB \pm 3.0dB
 40dB \pm 3.0dB

V.S.W.R

1.35 maximum
 1.40 max@10dB

Mechanical Data

Temperature Range: -55 °C - 125 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: mm

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KAT177984-XX

DESCRIPTION

Fixed Attenuator, 2.92 Male/Female, Uni-Directional

CAGE CODE

664U0

SIGNATURE

X

Attenuation Value=XXdB

Component

Housing
 Body
 Male Contact
 Female Contact

Material

Aluminum
 Stainless Steel
 Brass
 BeCu

Plating/Finish

Blacken Anodize
 Passivated
 Gold
 Gold

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.