

PART NUMBER

KAT178601-XX

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	DC-8.5GHz
Attenuation Range	10dB \pm 1.0dB 20dB \pm 0.75dB 30dB \pm 0.75dB 40-70dB \pm 1.0dB
Power Rating	500W @25°C derated linearly to 0 watts @ 125°C
Temperature Coefficient	<0.0004 dB/dB/°C
VSWR	1.30

RoHS Compliant**Mechanical Data**

Temperature Range: -55 °C - 125 °C

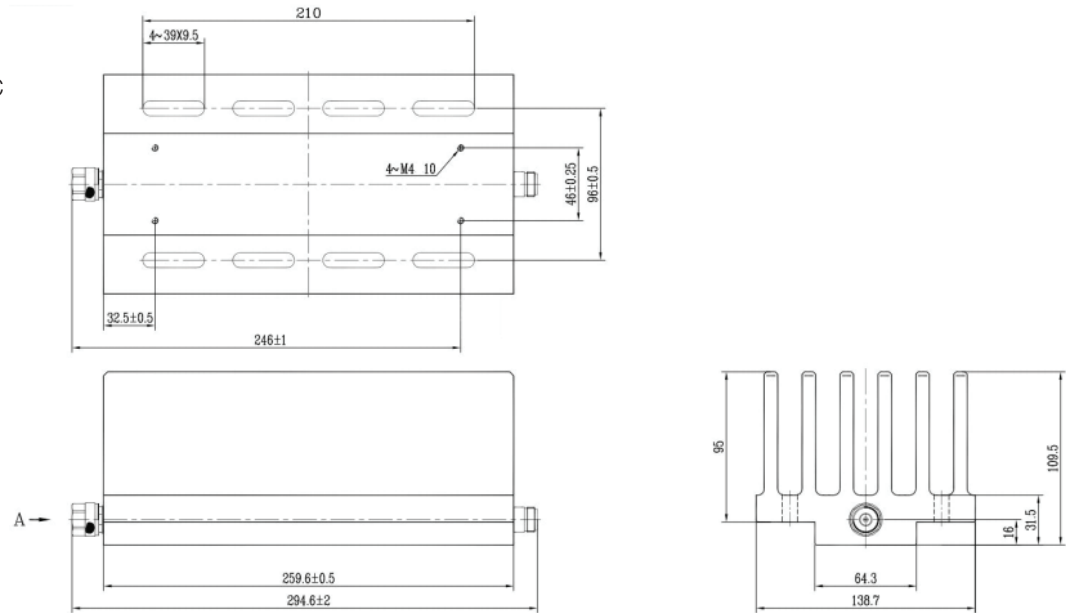

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RFWWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KAT178601-XX

DESCRIPTION

Fixed Attenuator, N Male/Female

CAGE CODE

664U0

SIGNATURE

X

Component
Body**Material**
Aluminum**Plating**
BlackTHIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.