| P | ΔF | ۲Т | N | IJΝ | ИE | BEF |
|---|----|----|---|-----|----|-----|
| | | | | | | |

KCA177251-18


| REV. | | INITIAL |
|------|--|---------|
| | | |

Electrical Data

 $\begin{array}{ll} \text{Impedance} & 50 \ \Omega \\ \text{Minimum Bend Radius} & 0.41 \end{array}$

Temperature Range -40°C ~ + 85°C

RoHS Compliant

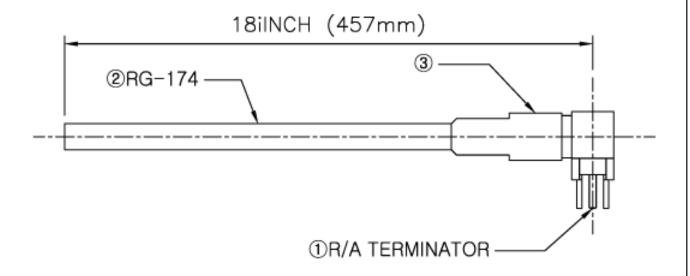

VSWR and Frequency Range Specifications are for reference and are dependent on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

H Konnect RF

WWW.KONNECTRF.COM 540 NW University Blvd. Ste. 109 Port Saint Lucie, Florida, 34986 1-800-790-5887

| PART NUMBER KCA177251-18 | Cable Assembly Pigtail - Right Angle 4 Leg Standoff PC Board - Termination |
|--|--|
| CAGE CODE SIGNATURE X | Cable Types RG 174 Materials |
| THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL. | 1. R/A Terminator x1 2. Coax Cable x1 3. Shrink Tube x1 |