

PART NUMBER

**KCC177486**

REV.

DATE

COMMENTS


INITIAL

**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	DC - 18 GHz.
Insertion Loss	0.25 max
Insulation Resistance	5,000 M $\Omega$
Dielectric Withstanding Voltage	1,000 V RMS
VSWR	1.5 max

**RoHS Compliant****Mechanical Data**

Durability 500 Cycles Min.

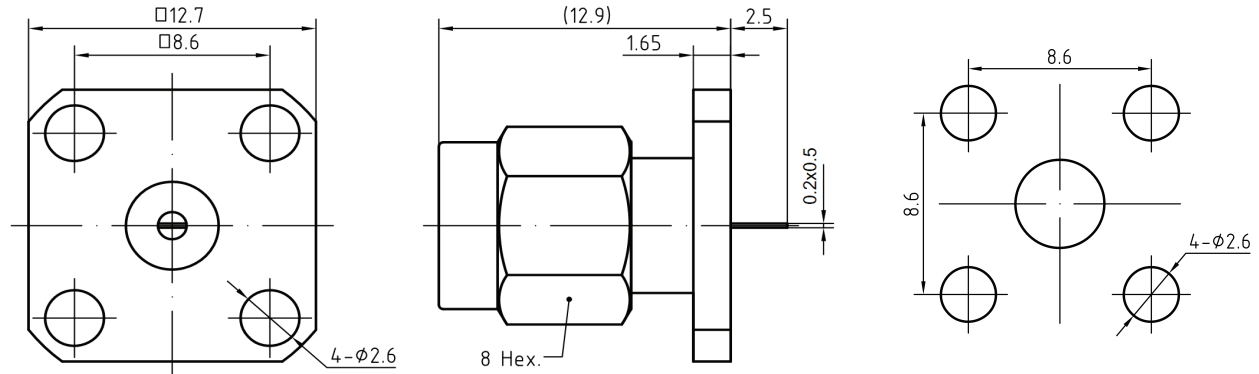

Recommend Mount hole

Drawing not to scale. Dimensions for reference only

Units: mm

**Konnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KCC177486**

DESCRIPTION

**SMA Straight Male Plug Receptacle, 4 Hole Flange Mount**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.

**Component**

Body & Nut  
Center Contact  
O-Ring  
Insulator

**Material**

Brass  
Brass  
Silicone Rubber  
PTFE

**Plating**

Gold  
Gold