

PART NUMBER

**KCC177640**

REV.

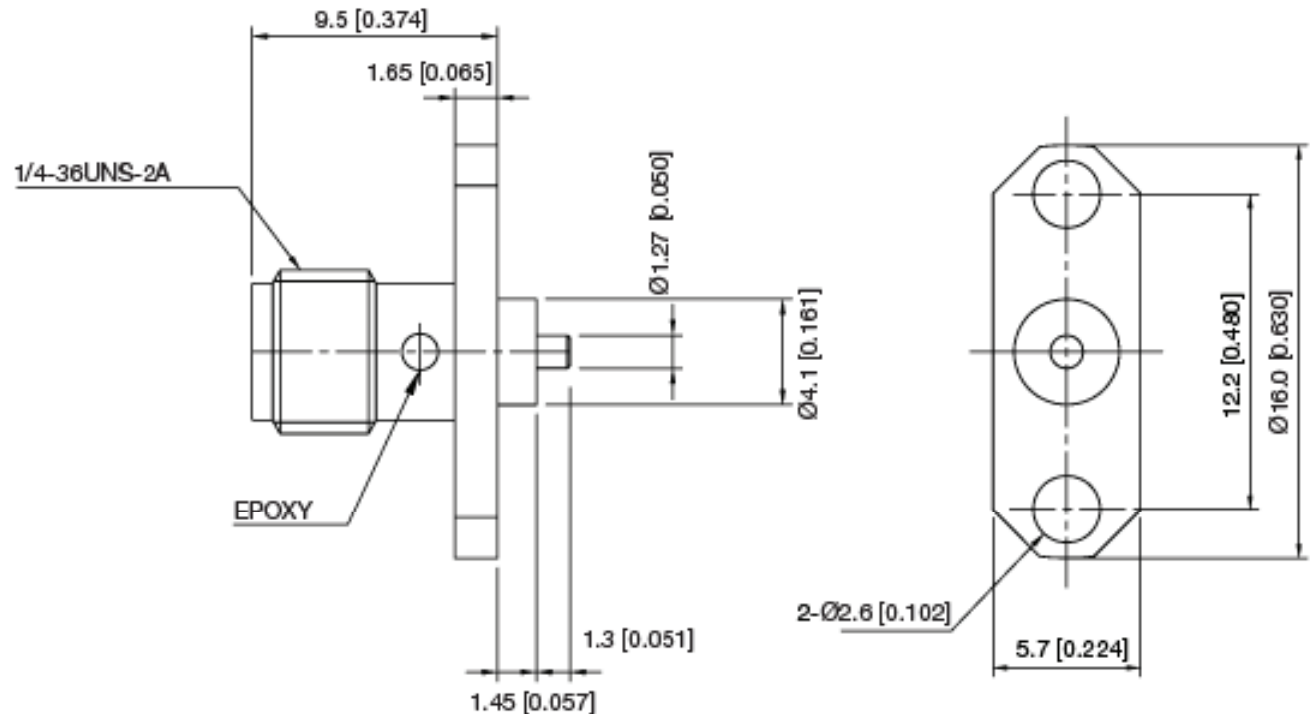
DATE

DESC.

INITIAL

**Electrical Data**

Impedance	50 $\Omega$
Frequency Range	DC ~ 18GHz
Voltage Rating	500V rms
DWV	1500V rms
Durability	500 Cycles
Contact Retention	6lbs Axial
Temperature Range	-4.0°C to + 165°C

**RoHS Compliant**

VSWR and Frequency Range Specifications  
are for reference and are dependant on cable  
type and other application specific conditions

Drawing not to scale. Dimensions for reference only

540 NW University Blvd. Ste. 109  
Port Saint Lucie, Florida, 34986  
1-800-790-5887

PART NUMBER

**KCC177640**

DESCRIPTION

**SMA Straight Female Jack Receptacle - 2 Hole Flange  
Mount - Extended Teflon - Blunt Post - Captive Contact**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.

**Materials**

Body  
Center Contact  
Insulator

Stainless Steel  
Be.Cu  
PTFE

Passivated  
Gold Plated