

PART NUMBER

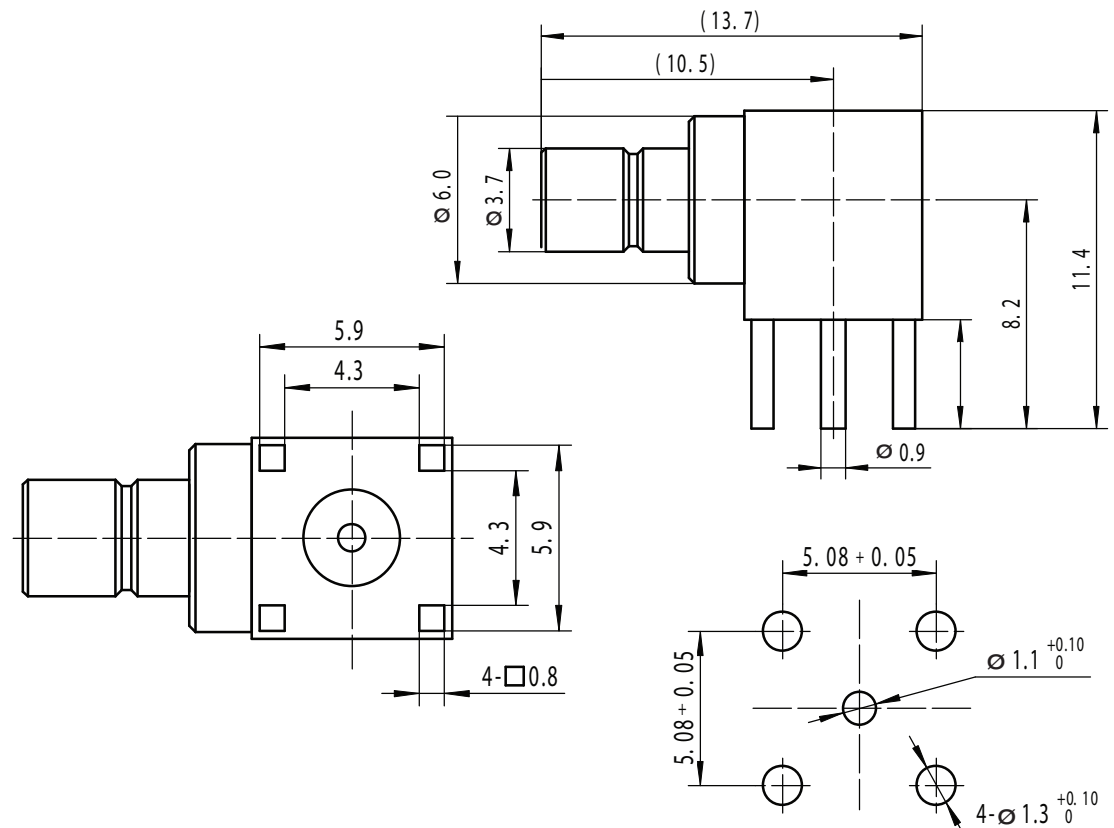
KCC177665

REV.

INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	DC - 4 GHz.
Contact Resistance	
Center Conductor	≤ 6.0 M Ω
Outer Conductor	≤ 1.0 M Ω
Insulation Resistance	≥ 1000 M Ω
Insulator Withstanding	750V
Durability	500 Cycles

RoHS Compliant

VSWR and Frequency Range Specifications
are for reference and are dependant on cable
type and other application specific conditions

Drawing not to scale. Dimensions for reference only

Units: mm

WWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KCC177665

DESCRIPTION

**SMB Right Angle Male Jack
4 Leg PC Board Receptacle**

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.

Component

Pin
Housing
Insulator

Material

Phos.Bronze
Brass
PTFE

Plating

Gold
Gold