

PART NUMBER

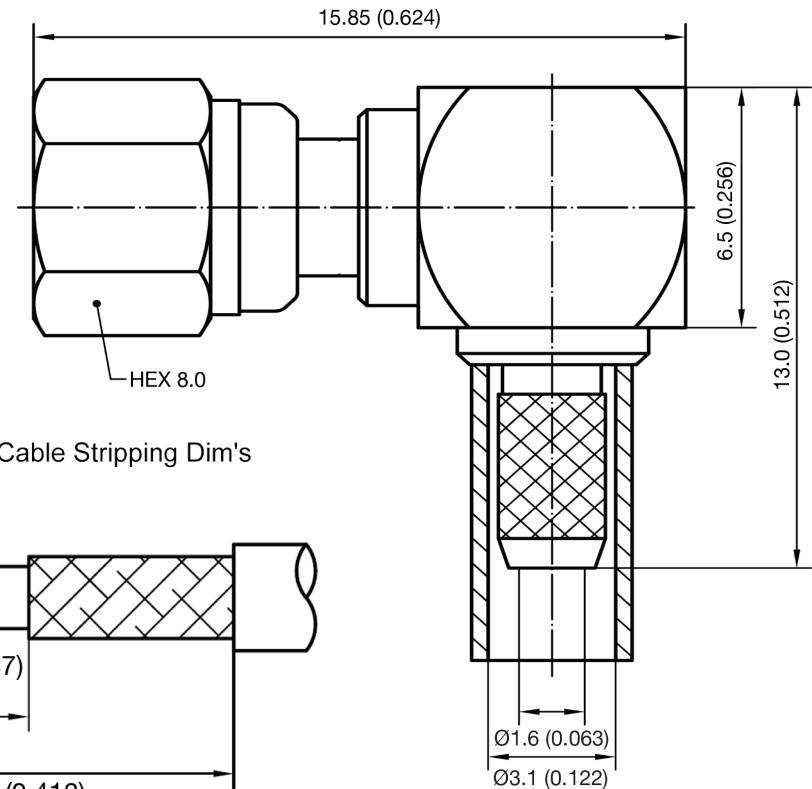
KCC177703

REV.

INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	DC - 10 GHz
VSWR	1.50 Max.
Insertion Loss	0.35 dB Max.
Insulation Resistance	1000M Ω
Test Voltage	750 V rms
Working Voltage	250 V rms

RoHS Compliant

Recommended Cable Stripping Dim's

VSWR and Frequency Range Specifications
are for reference and are dependant on cable
type and other application specific conditions

Drawing not to scale. Dimensions for reference only

WWW.KONNECTRF.COM
540 NW University Blvd. Ste. 109
Port Saint Lucie, Florida, 34986
1-800-790-5887

PART NUMBER

KCC177703

DESCRIPTION

**SMC Right Angle Female Plug
Crimp**

CAGE CODE

664U0

SIGNATURE

X

Cable Types RG 174, 188 & 316**Materials**

Body
Coupling Nut
Center Contact
Insulator

Brass
Brass
Be-Cu
PTFE

Gold Plated
Gold Plated
Gold Plated

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.