KCC177842

REV. INITIAL

Electrical Data

Impedance 50Ω

Frequency Range DC - 10 GHz


Return Loss 30 dB Min. @ DC - 2.5 GHz

20 dB Min. @ 2.5 - 6 GHz

Insertion Loss 0.3dB Max. @ DC - 6 GHz


 $\begin{array}{ll} \text{Insulation Resistance} & 5000 \text{M}\Omega \\ \text{Test Voltage} & 1500 \text{ V rms} \\ \text{Working Voltage} & 500 \text{ V rms} \end{array}$

Degree of Protection IP67

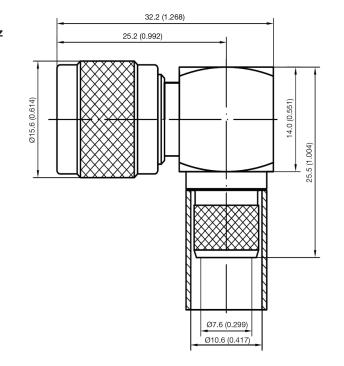

Recommended Stripping Dimensions

RoHS Compliant



VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

H Konnect RF

WWW.KONNECTRF.COM 540 NW University Blvd. Ste. 109 Port Saint Lucie, Florida, 34986 1-800-790-5887

