

PART NUMBER

**KCC178002**

REV.

INITIAL

**Electrical Data**

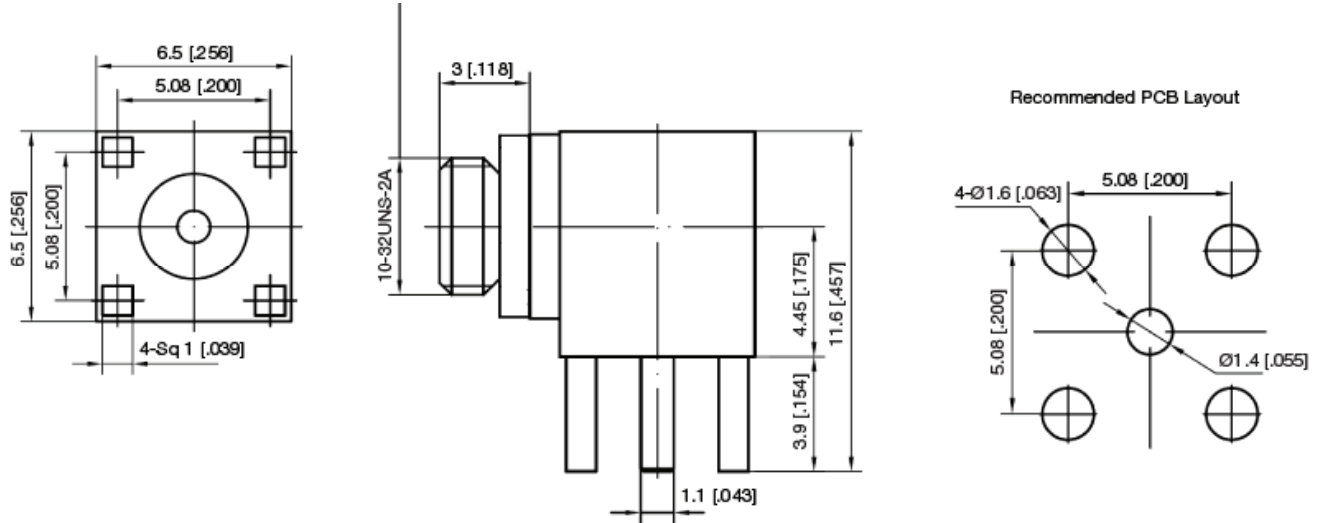
Impedance 50  $\Omega$   
 Frequency Range DC - 2 GHz  
 Return Loss 20 dB Max. @ DC - 1 GHz  
 16 dB Max. @ 1 - 2 GHz

Insertion Loss 0.15 dB Max.  
 Insulation Resistance 1000 M $\Omega$   
 Test Voltage 750 V rms  
 Working Voltage 250 V rms  
 Temperature -55°C + 155°C  
 Durability 500 Cycles Min.

All materials are RoHS compliance.

VSWR and Frequency Range Specifications  
 are for reference and are dependant on cable  
 type and other application specific conditions

Drawing not to scale. Dimensions for reference only

**RoHS Compliant**

WWW.KONNECTRF.COM  
 540 NW University Blvd. Ste. 109  
 Port Saint Lucie, Florida, 34986  
 1-800-790-5887

PART NUMBER

**KCC178002**

DESCRIPTION

**10-32 Right Angle Female Jack  
 4 Leg PC Board Receptacle**

CAGE CODE

**664U0**

SIGNATURE

X

**Materials**

Body  
 Center Contact  
 O-Ring  
 Insulator

Brass  
 Be.Bronze  
 Silicone Rubber  
 PTFE

Nickel Plated  
 Gold Plated

THIS DRAWING INCLUDING THE  
 DESIGNS IS THE PROPERTY OF  
 KONNECT RF AND IS NOT TO  
 BE USED FOR ANY PURPOSE  
 WITHOUT OUR APPROVAL.