

PART NUMBER

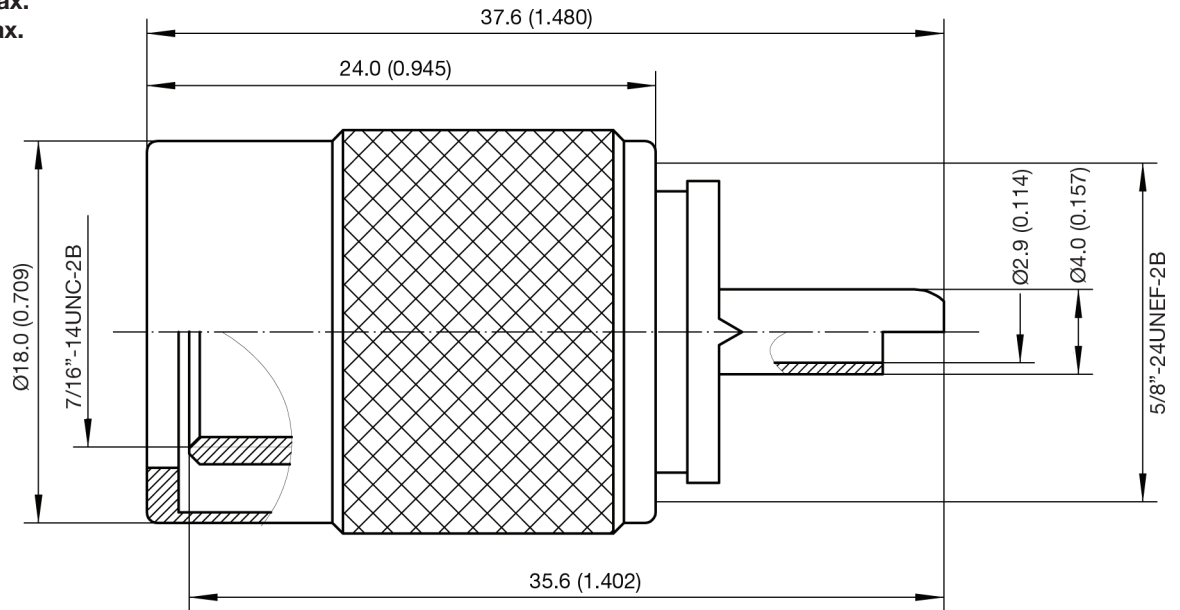
KCC178471

REV.

INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range DC - 2.5 GHz
 Insulation Resistance 5000M Ω min.
 Insulation Withstanding 1000V
 Contact Resistance Center contacts: 5.0m Ω Max.
 Outer contacts: 3.0m Ω Max.

RoHS Compliant

VSWR and Frequency Range Specifications
 are for reference and are dependant on cable
 type and other application specific conditions

Drawing not to scale. Dimensions for reference only

WWW.KONNECTRF.COM
 540 NW University Blvd. Ste. 109
 Port Saint Lucie, Florida, 34986
 1-800-790-5887

PART NUMBER

KCC178471

DESCRIPTION

**UHF Straight Male Plug
Solder**

CAGE CODE

664U0

SIGNATURE

X

Cable Types

RG 8, 9, 11, 63, 87, 213, 214 & 225

Materials

Body / Nut
 Center Contact
 Insulator

Brass
 Brass
 PTFE

Nickel Plated
 Gold Plated

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.