Р	Δ	RT	٦,	ш	M	IR	F	F


KCC178814

REV.		INITIAL	

Impedance 50 Ω

Frequency Range DC - 40 GHz **VSWR** 1.3 to 40 GHz .05 √Frequency **Insertion Loss**

RoHS Compliant Electrical Data

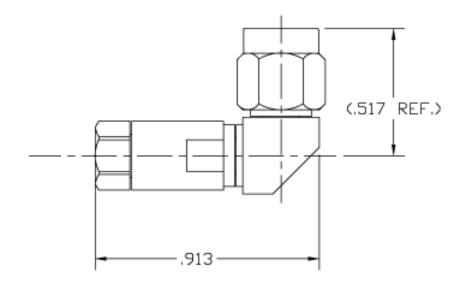

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

H Konnect RF

WWW.KONNECTRF.COM 540 NW University Blvd. Ste. 109 Port Saint Lucie, Florida, 34986 1-800-790-5887

PART NUMBER	CC178814	DESCRIPTION 2.9 mm Right Angle Male Plug - Clamp/Solder			
CAGE CODE 664U0 THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.		Materials Body Center Conductor	Stainless Steel Be.Cu	Passivated Gold Plated	