PART NUMBER

KCC178850

REV.	DATE	COMMENTS	INITIAL

Electrical Data

Impedance 50 Q


DC - 40 GHz. Frequency Range **VSWR** ≤ 1.30 @ 40 GHz

Mechanical Data

Durability 500 Cycles Min. Temperature Range: -55 °C -100 °C



RoHS Compliant

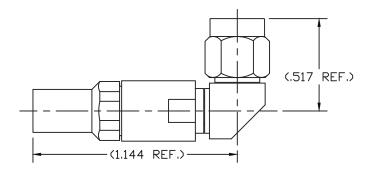

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

Units: inches

H Konnect RF

WWW.KONNECTRF.COM 1-800-790-5887

PART NUMBER DESCRIPTION KCC178850 CAGE CODE **SIGNATURE** 664U0 THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE

WITHOUT OUR APPROVAL.

2.9mm Right Angle Male Plug, Clamp/Solder

Cable Types: IW1501

Component Material Plating/Finish Body Stainless Steel Passivated Gold Center Contact BeCu PTFF Insulator