

PART NUMBER

**KCC179920**

REV.


DATE

COMMENTS

INITIAL

**RoHS Compliant****Electrical Data**

Impedance	50 $\Omega$
Frequency Range	DC - 18 GHz.
Insulation Resistance	5,000 M $\Omega$ min.
Contact Resistance	<3m $\Omega$
working voltage	335 V rms max
Dielectric Withstanding Voltage	1,000 V min
VSWR	$\leq 1.20@18\text{GHz}$
Insertion Loss	0.2dB max
Power Handling	2W min

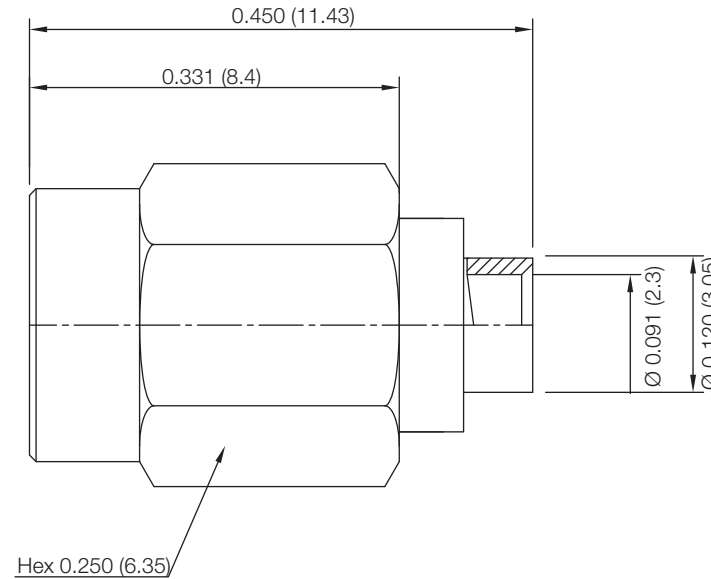

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

**Konnect RF**

WWW.KONNECTRF.COM  
1-800-790-5887

PART NUMBER

**KCC179920**

DESCRIPTION

**SSMA Straight Male Plug, Solder**

CAGE CODE

**664U0**

SIGNATURE

X

**Cable Types:** .085 S/R (RG-405)**Component**

Body &amp; Coupling Nut

Center Contact

Gasket

Insulator

**Material**

Stainless Steel

BeCu

Silicone Rubber

PTFE

**Plating**

Gold

Gold

THIS DRAWING INCLUDING THE  
DESIGNS IS THE PROPERTY OF  
KONNECT RF AND IS NOT TO  
BE USED FOR ANY PURPOSE  
WITHOUT OUR APPROVAL.