

PART NUMBER

KCC187086

REV.

DATE

COMMENTS


INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range DC-18 GHz
 Voltage Rating 500 Max
 Dielectric Withstanding Voltage 750 VRMS
 Insulation Resistance 5,000 m Ω
 VSWR 1.25 max @ 18 GHz

RoHS Compliant**Mechanical Data**

Temperature Range: -65 °C - 165 °C

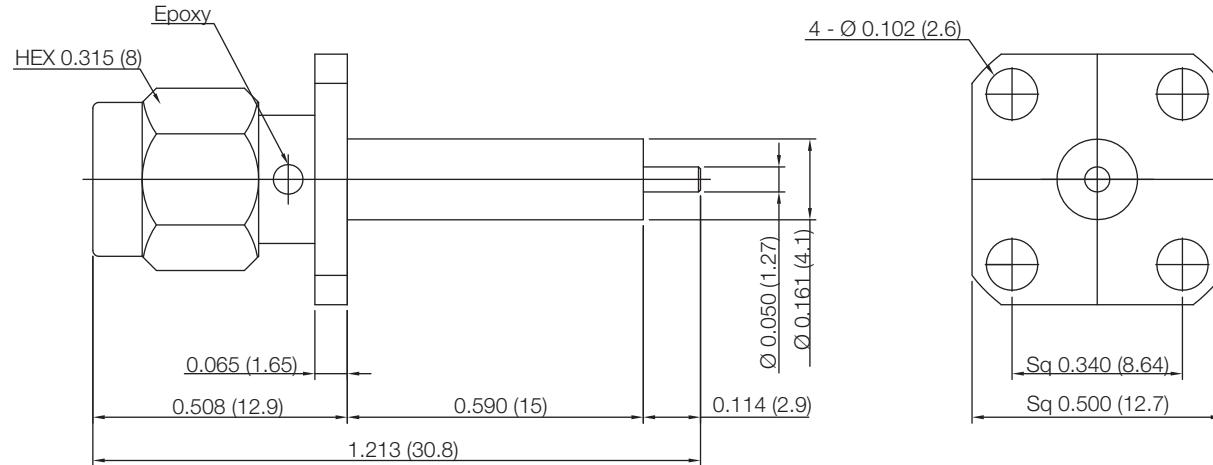

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KCC187086

DESCRIPTION

**SMA Straight Male Plug Receptacle, 4 Hole Flange Mount,
 Extended Teflon, Blunt Post Epoxy Captivated**

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component
 Body & Nut
 Center Contact
 Insulator

Material
 Brass
 Brass
 PTFE

Plating
 Gold
 Gold