

PART NUMBER

KCC187923

REV.

DATE

COMMENTS

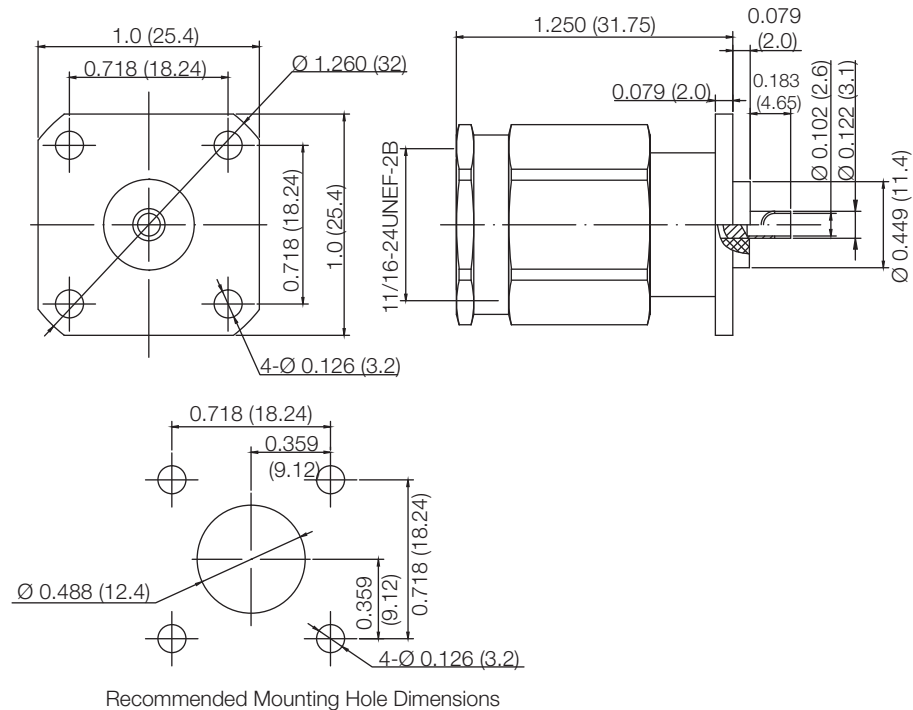
INITIAL

Electrical Data

Impedance	50 Ω
Frequency Range	DC - 8 GHz.
Insertion Loss	≤ 0.25 dB
Test Voltage	1,500 VRMS
Insulation Resistance	$\geq 5,000$ M Ω
VSWR	≤ 1.25 @ DC-4 GHz ≤ 1.4 @ 4-8 GHz

Mechanical Data

Temperature Range: -65 °C - 125 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RFWWW.KONNECTRF.COM
1-800-790-5887

PART NUMBER

KCC187923

DESCRIPTION

**SC Straight Male Plug Receptacle, 4 Hole Flange Mount,
Blunt Post, Extended Teflon, Captive Contact, Mechanical Captivation**

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
DESIGNS IS THE PROPERTY OF
KONNECT RF AND IS NOT TO
BE USED FOR ANY PURPOSE
WITHOUT OUR APPROVAL.**Component**Body
Center Contact
Nut
Insulator**Material**Brass
Brass
Brass
PTFE**Plating**White Bronze
Gold
Nickel