

PART NUMBER

**KSW177972**

REV.

DATE

COMMENTS


INITIAL

**Electrical Data**

Impedance 50  $\Omega$   
 Operating Voltage: DC12V/300mA (DC24V/150mA)  
 High Power:DC12V/480mA (DC24V/240mA)  
 Switching Time: <20ms  
 Life: >1,000,000cycles  
 Switching Sequence:Break Before Make  
 Control Voltage DC-24V  
 Frequency Range DC-6GHz  
 TTL Function With TTL  
 Indicator Function  
 VSWR 1.35

**RoHS Compliant****Mechanical Data**

Temperature Range: -40 °C - 85 °C

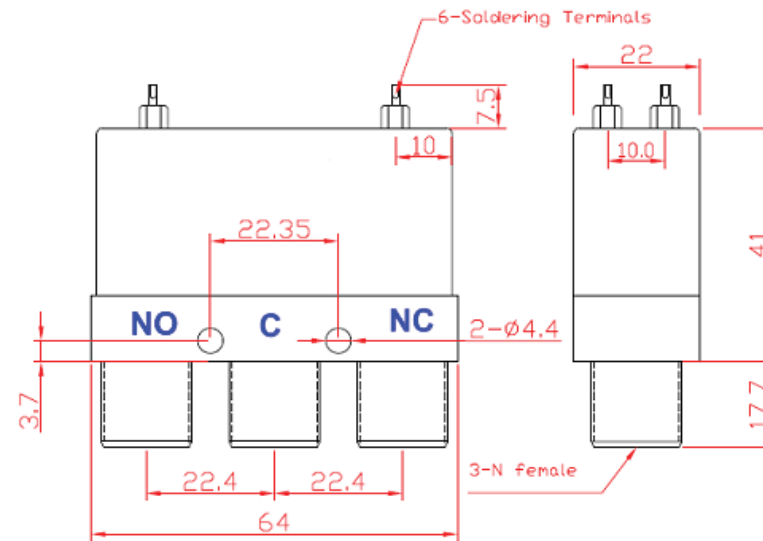

Drawing not to scale. Dimensions for reference only

Units: mm

**Konnect RF**

WWW.KONNECTRF.COM  
 1-800-790-5887

PART NUMBER

**KSW177972**

DESCRIPTION

**Failsafe Switch, N Female**

CAGE CODE

**664U0**

SIGNATURE

X

THIS DRAWING INCLUDING THE  
 DESIGNS IS THE PROPERTY OF  
 KONNECT RF AND IS NOT TO  
 BE USED FOR ANY PURPOSE  
 WITHOUT OUR APPROVAL.