

PART NUMBER

KAD177328

REV.

INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range DC - 18GHz
 VSWR 1.3 Max.
 Insertion Loss 0.25dB Max.
 Insulation Resistance 5000M Ω Min.
 Test Voltage 1000V rms
 Working Voltage 480V rms

Contact Resistance Center Contact 3.0m Ω
 Outer Contact 2.5m Ω


Temperature Range -65-+165Deg.C

All Materials are RoHS Compliant

RoHS Compliant

VSWR and Frequency Range Specifications are for reference and are dependant on cable type and other application specific conditions

Drawing not to scale. Dimensions for reference only

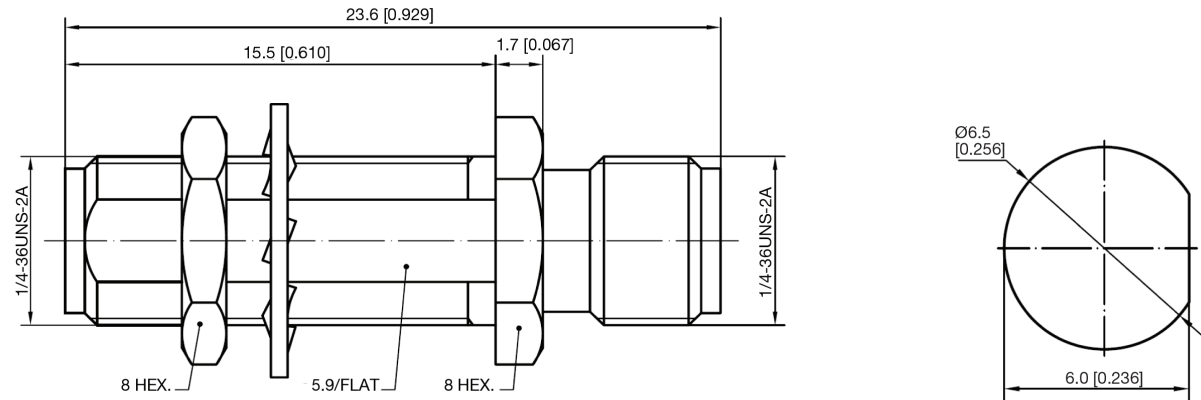

540 NW University Blvd. Ste. 109
 Port Saint Lucie, Florida, 34986
 1-800-790-5887

PART NUMBER

KAD177328

DESCRIPTION

Adapter - In-Series
SMA Female Jack to Female Jack Bulkhead

CAGE CODE

664U0

SIGNATURE

X

Materials

Body
 Nut / Washer
 Center Contact
 Insulator

Stainless Steel
 Stainless Steel
 Be-Cu
 PTFE

Gold Plated
 Gold Plated
 Gold Plated

THIS DRAWING INCLUDING THE DESIGNS IS THE PROPERTY OF KONNECT RF AND IS NOT TO BE USED FOR ANY PURPOSE WITHOUT OUR APPROVAL.