

PART NUMBER

KAD177498

REV.

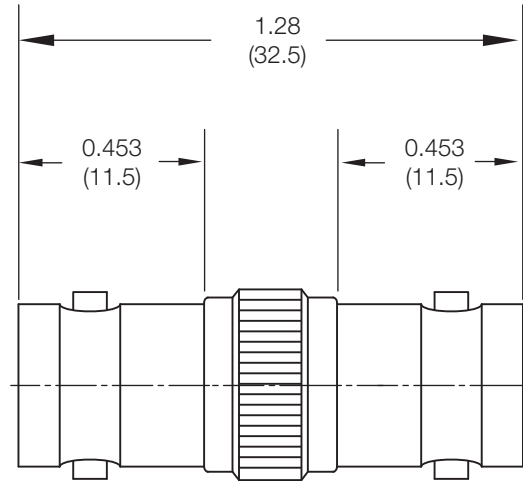
INITIAL

Electrical Data

Impedance 50 Ω
 Frequency Range DC - 4 GHz.
 Insertion Loss $\leq .2$ dB
 Working Voltage Rating 400 VRMS
 Test Voltage 1500 VRMS
 Insulation Resistance 5000 M Ω
 VSWR ≤ 1.15 @ DC - 3 GHz.
 ≤ 1.25 @ 3 - 4 GHz.

Mechanical Data

Durability 500 Cycles Min.
 Temperature Range: -55 °C - 155 °C

RoHS Compliant

Drawing not to scale. Dimensions for reference only

Units: inches (mm)

Konnect RF

WWW.KONNECTRF.COM
 1-800-790-5887

PART NUMBER

KAD177498

DESCRIPTION

Adapter, In-Series, BNC Female Jack to Female Jack

CAGE CODE

664U0

SIGNATURE

X

THIS DRAWING INCLUDING THE
 DESIGNS IS THE PROPERTY OF
 KONNECT RF AND IS NOT TO
 BE USED FOR ANY PURPOSE
 WITHOUT OUR APPROVAL.

Component

Body
 Center Contact
 Insulator

Material

Brass
 Phos. Bronze
 PTFE

Plating

Nickel
 Gold